




EASY 5 COLORS
SELECTOR
2700K • 3000K • 3500K • 4000K • 5000K

Dimensions

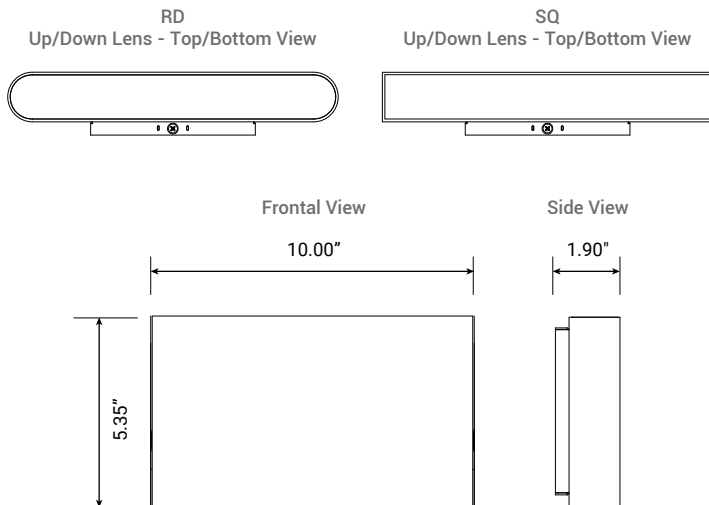


NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
2800L	2800L	23W

Based on 4000K, 90+ CRI. Actual wattage may vary +/-5%

FEATURES

Modern and versatile, this round wall sconce blends clean architectural styling with durable performance. Its aluminum body and glass diffuser offer an elegant look, while Up & Down, Up only, or Down only light distributions provide design flexibility. Field-selectable CCTs and TRIAC dimming (120V) allow you to tailor the ambiance to any setting. Built to withstand the elements with an IP65 rating and a 50,000-hour lifespan. Perfect for facades, entryways, corridors, and walkways.

LUMENS	2800L (1400L Up / 1400L Down)
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Wall Mount
VOLTAGE	120-277VAC
DIMMING	Dual Dimming (DIMTR-DIM10)
RATING	IP65
BEAM ANGLE	90° Up and Down
FINISH	BZ (Bronze), BK (Black), WH (White), SI (Silver)
OPERATING TEMP	-40°C (-40°F) to 50°C (122°F)
LIFETIME	L70 AT 50,000 Hours



OPTICS

Features a glass lens diffuser for uniform light diffusion and glare control. Powered by ultra efficient LEDs for extended lifetime and optimal performance.

Luminaire available in 2800L with five selectable color temperatures of 2700K/3000K/3500K/4000K/5000K enable different warm to cool moods and atmospheres.

CCT factory set to 50K.

CONSTRUCTION

Features a durable aluminum housing for lightweight handling and installation and optimal thermal conduction.

Fully enclosed-and-gasketed construction for IP65-rated protection against water and dirt.

Available in white, bronze, black, and silver finishes.

MOUNTING

Wall Mount

Designed specifically for direct wall mounting applications. Ideal for building facades entryways, doorways, walkways, pathways, patios, porches, garage exteriors, perimeter walls, outdoor stairwells, commercial storefronts, hospitality exteriors (hotels, restaurants), parking structure walls.

INSTALLATION

Up/Down: Mount fixture vertically to provide simultaneous upward and downward illumination.

Up Only: Install with the bottom opening sealed; light will emit upward only.

Down Only: Install with the top opening sealed; light will emit downward only.

DIMMING & DRIVER INFORMATION

DIMTR - 10% Triac dimming at 120V.

DIM10 - 0-10V dimming on either MVOLT 120-277V.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

ETL listed.

IP65 rated.

Wet Location certified.

ADA compliant.

Example: **OWS-FC-213-SQ-LED-UD-2800L-DIMTR/120-DIM10/MVOLT-27K/30K/35K/40K/50K-90-BK**

