

OWS-FC-303-LED

LED Round Full Cut-Off Wall Sconce Series
4 Lumen selectable

Up to 8000 Lumens

Catalog Number:


Project Name:

Note:

Type:



DIMENSION:

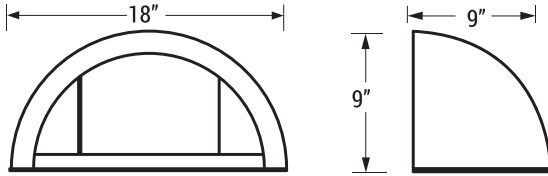

B	U	G
2	1	0

APPLICATIONS:

The round architectural LED wall sconce provides efficient long lasting light ideal for wall wash and facade lighting. Traditional design allows for a simple upgrade from traditional MH fixtures. Multiple lumen packages improve design versatility and allow for consistent aesthetics throughout a project. Designed for walkways, entryways, and general perimeter lighting. Full cut-off meets Dark Sky requirements.

FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen Selectable output: 2000/4000/6000/8000 lumens
- 15W-53W power consumption, to replace 100-200W MH
- Motion sensor and Photocell optional
- Optional battery back-up option for emergency egress lighting
- Type III distribution lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location

SPECIFICATIONS:

LUMENS	2000L/4000L/6000L/8000L
WATTAGE	15W/25W/40W/53W
CCT	40K, 50K
CRI	85+
LIGHT EFFICIENCY	Up to 150 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, Black, White, Silver
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C



Ordering Guide > Example: OWS-FC-303-LED-2000L/4000L/6000L/8000L-DIM10-MVOLT-40K-BZ

SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	OPTION
OWS-FC-303-LED	2000L/4000L/6000L/8000L	DIM10 - 0-10V	MVOLT - 120-277V	35K - 3500K 40K - 4000K 50K - 5000K	BZ - Bronze BK - Black WH - White SI - Silver	O-EMG-LED	PHC - Photocell