



<b>LUMENS</b>	3000L	<b>SIZE</b>	15" H x 30.3" W
<b>CCT &amp; TECHNOLOGIES</b>	3000K, 3500K, 4000K	<b>FIXTURE FINISH</b>	BK (Black), WH (Matt White), SI (Silver), Custom RAL
<b>COLOR QUALITY</b>	3 Step MacAdam Ellipse	<b>MATERIAL COLORS</b>	Refer to SoftSense Material Color Chart
<b>MOUNTING</b>	Pendant, Suspended	<b>PHOTOMETRIC TESTS</b>	In Accordance with IES LM79-08 and LM-80, and TM-30
<b>DIMMING &amp; CONTROLS</b>	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH, DIMTR	<b>CRI</b>	80+

The **Moonlight** Acoustic pendant turns open spaces into productive work zones. The pendant is specifically designed to add a decorative element that doubles as a highly effective means of sound management. Ideal for shared workspaces and open-office environments, **Moonlight** provides functional illumination with a high-performance LED light source to illuminate work surfaces. The product is available in a wide range of colors.



**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

Noise Reduction Coefficient (NRC) - 0.75  
Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

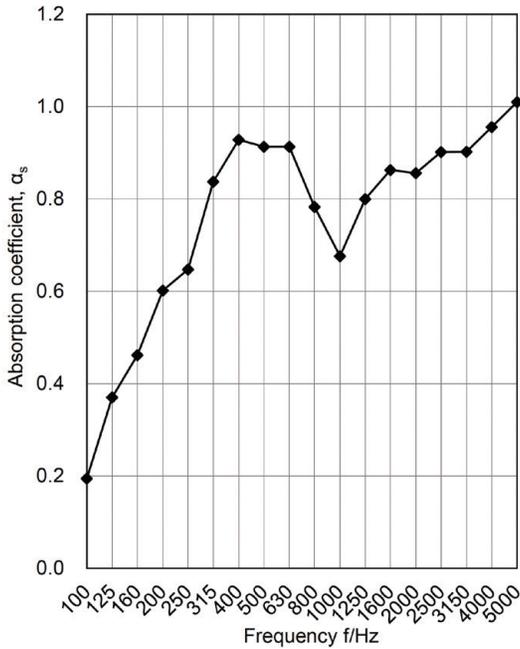

**CONSTRUCTION**

PET material wrapped around rigid steel design that ensures longevity and endurance. A high quality, high transmission PMMA glare free lens offers smooth illumination.

**OPTICS & PERFORMANCE**

The light engines found in the OPR-LED-Rhapsody are rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K, and 4000K. Rated and tested to LM-79, LM-80, and TM-30 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

**DRIVER ELECTRICAL INFORMATION**

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. OPR-LED-Rhapsody comes standard with 0-10V dimming on either 120V-277V. For 347V, please consult factory. Consult factory for dimmer compatibility.

**DIMMING**

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

**DIMTR** - Triac & Electronic low voltage dimming. Available in 120V.

**LUTH** - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

**MOUNTING**

Comes standard in adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Also available in pendant mount.

**WARRANTY**

5-year warranty for parts and components (labor not included).

**LISTINGS**

**c-UL-us** - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

**UL Listed for dry location**

**QUALITY CONTROL**

Every fixture is rigorously tested by our QC Department before shipping.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

**OPTIONS**


Available without light source.

Example: **OPR-RHAPSODY-SOFT-MOONLIGHT-30IN-4200L-DIM10-MVOLT-50K-80-WH-SM-GRN**

RHAPSODY-SOFT												GRN
<b>SERIES</b> RHAPSODY-SOFT SoftSense LED Pendant	<b>STYLE</b> MOONLIGHT - Moonlight	<b>SIZE</b> 30IN - 30.3" W x 15" H	<b>DIRECT LUMENS</b> 4200L - 4200 Lumens 5600L - 5600 Lumens	<b>DIMMING</b> DIM10 - 0-10V Dimming <sup>3</sup> LUTH - Lutron HiLumen <sup>3</sup> DIMTR - Triac Dimming <sup>4</sup>	<b>VOLTAGE</b> 120 <sup>4</sup> MVOLT <sup>3</sup>	<b>CCT</b> 27K - 2700K 30K - 3000K 35K - 3500K 50K - 5000K 57K - 5700K 66K - 6600K RGB - RGB TUN - Tuneable white, 2700K - 6500K	<b>CRI</b> 80+ 90+	<b>EMERGENCY</b> 0-EMG-LED-10W <small>remote only</small>	<b>FINISH</b> WH - Matte White BK - Black SI - Silver RAL <sup>1</sup> - custom color	<b>MOUNTING OPTIONS</b> SC - Single Canopy Mount up to 10 ft. MC - Multi Canopy Mount up to 10 ft.	<b>ACOUSTIC COLOR</b> <small>Refer to SoftSense material color chart for options</small> example: GRN - Green	

- 1 Consult Factory
- 2 No Light Source, please skip to "Mounting Option"
- 3 DIM10 and LUTH available in 120V thru 277V input (DIM10-MVOLT, LUTH-MVOLT)
- 4 DIMTR available with 120V only (DIMTR-120).


**DIMENSIONS\***

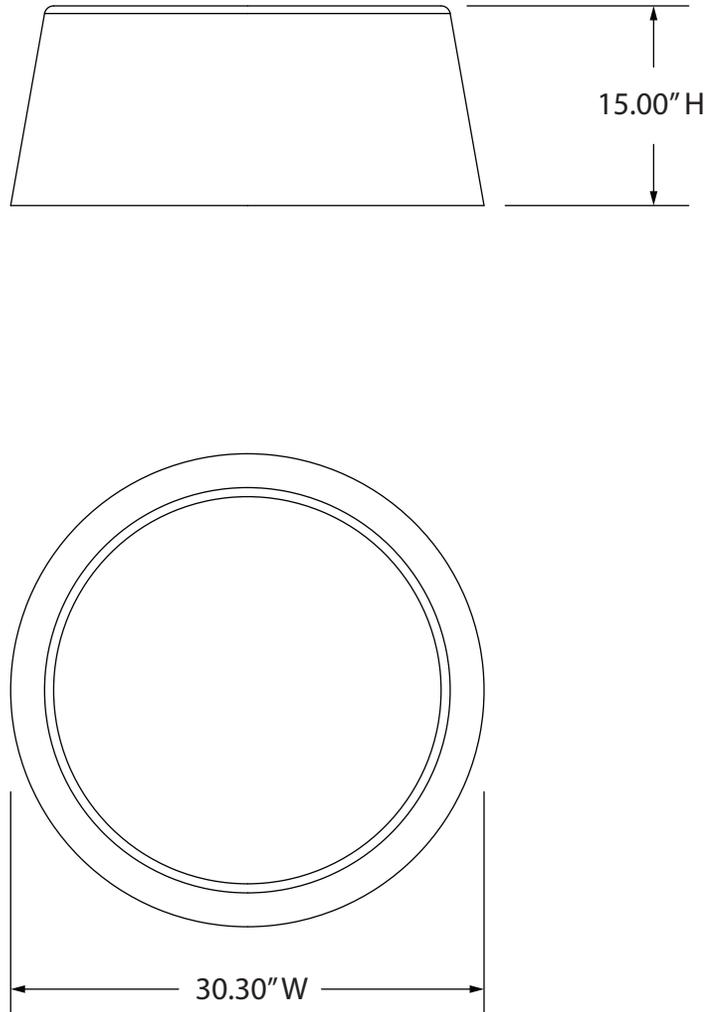

\*Dimensions are nominal and may vary by +/- 0.50"

**MOUNTING**


3.5" Octagonal J-box,  
4" Octagonal J-box, or  
4" Round J-box

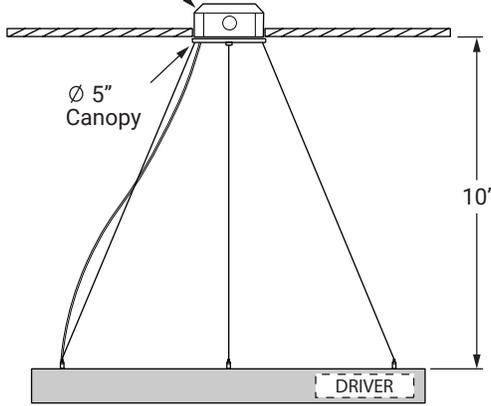

Power Cord + Aircraft Cable  
**SC - Single Canopy**

**INTEGRATED DRIVER**

3.5" Octagonal J-box,  
4" Octagonal J-box, or  
4" Round J-box

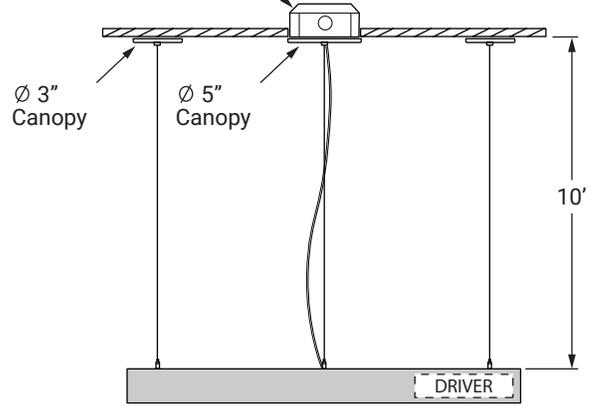

Power Cord + Aircraft Cable  
**MC - Multiple Canopies**

 1 Power cable

**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated



Light Grey (LG)



Dark Grey (DG)



Black (BK)



Brown (BR)



Dark Blue (DB)



Cyan (C)



Yellow (Y)



Orange (O)



quick ship available for any color depending on order quantity  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A