



|                               |  |                          |   |
|-------------------------------|--|--------------------------|---|
| <b>LUMENS</b>                 | 750L, 1100L, 1500L   | <b>DIAMETER</b>          | (S) 25.5", (M) 34", (L) 42"                         |
| <b>CCT &amp; TECHNOLOGIES</b> | 2700K, 3000K, 3500k, 4000K   | <b>HEIGHT</b>            | (S) 21.5", (M) 29.5", (L) 36.5"                     |
| <b>COLOR QUALITY</b>          | 3 Step MacAdam Ellipse   | <b>FIXTURE FINISH</b>    | BK (Black), WH (White)                              |
| <b>MOUNTING</b>               | Suspended  | <b>MATERIAL COLORS</b>   | Refer to SoftSense Material Color Chart             |
| <b>DIMMING &amp; CONTROLS</b> | 0-10V Flicker Free 1% Dimming Standard (DIM10),<br>Triac Dimming (DIMTR) | <b>PHOTOMETRIC TESTS</b> | In Accordance with IES LM79-08 and LM-80, and TM-30 |

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Windchime** model is distinguished by its vertical 8-bladed composition. Surrounding the luminaire, sculptural acoustic blades create a striking architectural presence while gently absorbing sound. Meticulously designed to elevate both acoustics and visual impact, Alpina introduces depth, texture, and a refined sense of sophistication to modern interiors.



02.06.26

**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**


Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

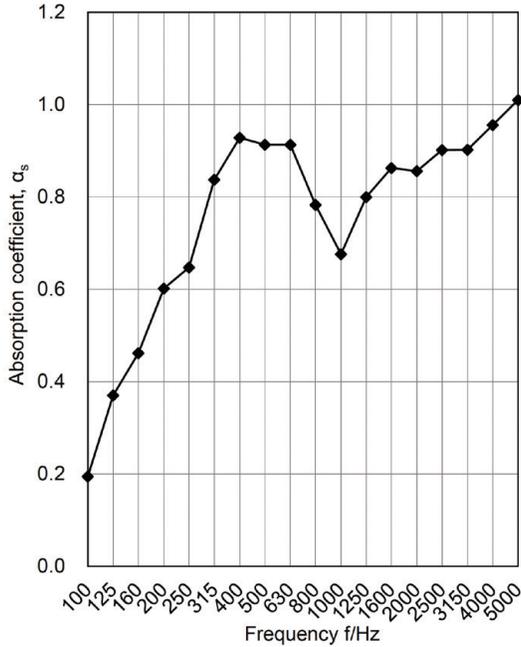

**DRIVER ELECTRICAL INFORMATION**

Powered by high-quality constant-current power LED drivers that are rated for 50/60Hz at 120V through 277V input (MULT), produces less than 20% THD, and have a power factor (pf) of .90 to 1.00. Rhapsody-Soft-Blossom comes with 0-10V dimming (DIM10) on 120V through 277V (MULT), 120V (120), or 277V (277) and Triac Dimming (DIMTR), 120V only. Consult factory for dimmer compatibility.

**MOUNTING**

Comes standard in adjustable cord pendant mount providing fast installation into a variety of interior heights, including sloped ceilings. For use with mounting to a 4" octagonal j-box.

**WARRANTY**

5-year warranty for parts and components (labor not included).

**LISTINGS**

cULus Listed for Feed Through Wiring (luminaire only).

UL Listed for Damp location. (luminaire only).

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

ASTM-E-84 Fire Rated (acoustic only)

SCS Recycled content Certified (acoustic only)

BAA - Buy American Act compliant government procurement requirements under FAR, DFARS and DOT regulations

Can be used to comply with Title 24, non residential lighting requirements.

For DesignLights Consortium® (DLC) qualified products please visit <http://www.designlights.org>. Not all family members will be listed for DLC Premium or DLC Standard.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or vacuum. The glass globe can be regularly and safely wiped down for peak performance. The LED and LED driver are able to be serviced and replaced after installation.

**NOTES**

Due to the reflected light from the surrounding acoustic material, the color of the specified acoustic panels may impact the fixture's perceived light output and color rendering.

Example: **RHAPSODY-SOFT-WINDCHIME-21IN-725L-DIM10-MVOLT-40K-85-WH-SM-GRN**


| RHAPSODY-SOFT                          |                          |  |  |   |                     |  |     |                              |                          |  |                     |  | GRN                   | optional dual color |
|--|--------------------------|--|--|---|---------------------|--|-----|------------------------------|--------------------------|--|---------------------|--|-----------------------|---------------------|
| SERIES                                 | STYLE                    | SIZE   | DIRECT LUMENS  | LUMENS  | VOLTAGE             | CCT  | CRI | EMERGENCY                    | FINISH                   | MOUNTING OPTIONS   | CANOPY <sup>5</sup> | ACOUSTIC COLOR   | 2 <sup>ND</sup> COLOR |                     |
| RHAPSODY-SOFT<br>SoftSense LED Pendant | WINDCHIME<br>- Windchime | 21IN - 21.5" H x 25.5" W<br>29IN - 29.5" H x 34" W<br>36IN - 36.5" H x 42" W | 750L - 750 Lumens<br>1100L - 1100 Lumens<br>1500L - 1500 Lumens<br>E26 - 60W MAX Medium base-lamp not included, 120V<br>NLS <sup>1</sup> - No Light Source | DIM10 - 0-10V Dimming<br>DIMTR <sup>2</sup> - Triac Dimming | 120<br>277<br>MVOLT | 27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K | 90+ | EMG-LED-10W<br>(Remote only) | WH - White<br>BK - Black | SM - Suspended Mount up to 10 ft.<br>SM20 - Suspended Mount up to 20 ft. | DP-Deep Canopy      | Refer to SoftSense material color chart for options<br>example:<br>GRN - Green |                       |                     |



DP - Deep Canopy


<sup>1</sup> No Light Source, please skip to "Mounting Option" (e.g., -NLS-SM-)  
<sup>2</sup> DIMTR available only in 120V

**DIMENSIONS\***


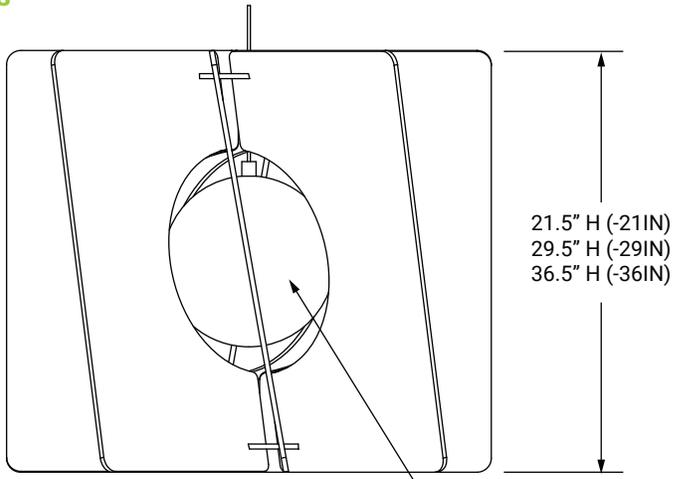


With Light Source

Globe: Ø10" (-21IN)  
Ø14" (-29IN)  
Ø20" (-36IN)

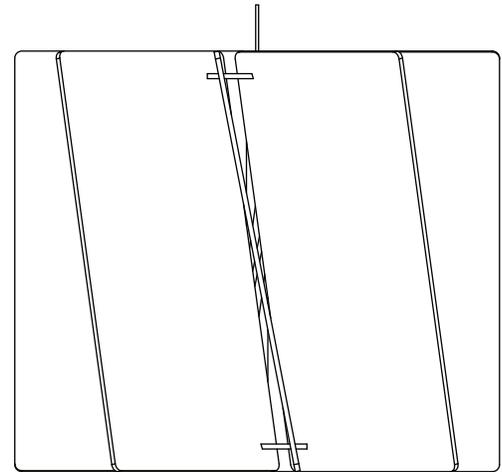

No Light Source


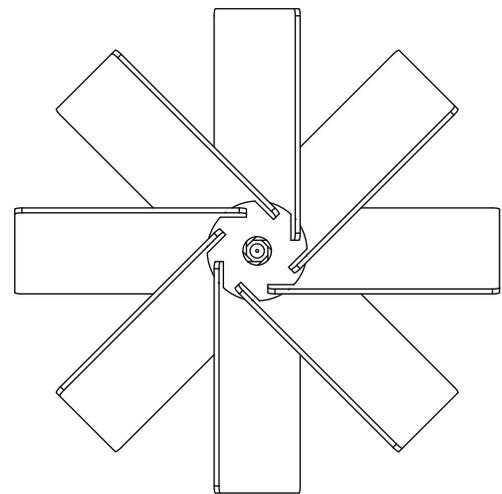
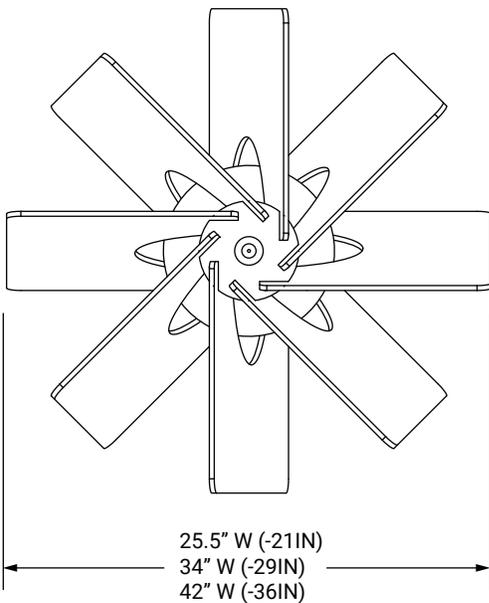


\*Dimensions are nominal and may vary by +/- 0.50"

**MOUNTING**

■ LED Driver location

**DP - Deep Canopy**

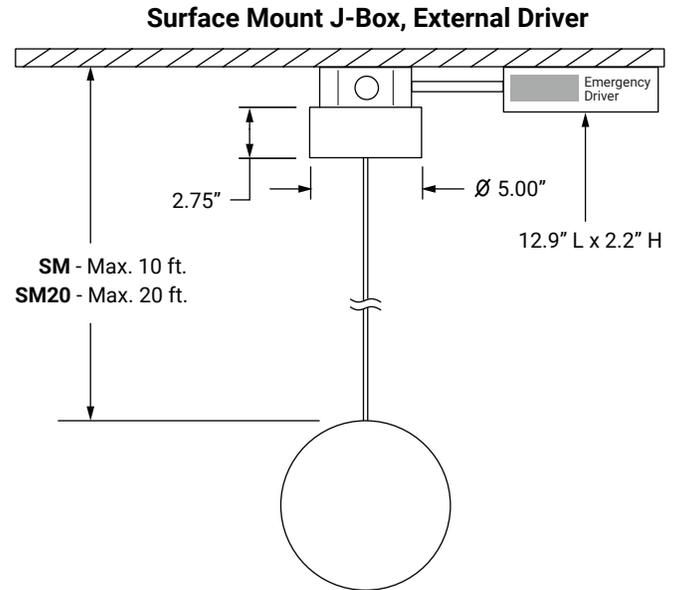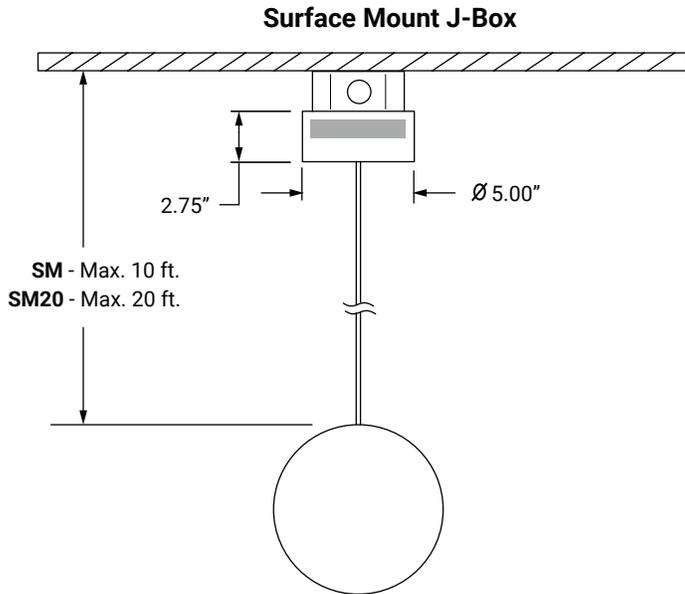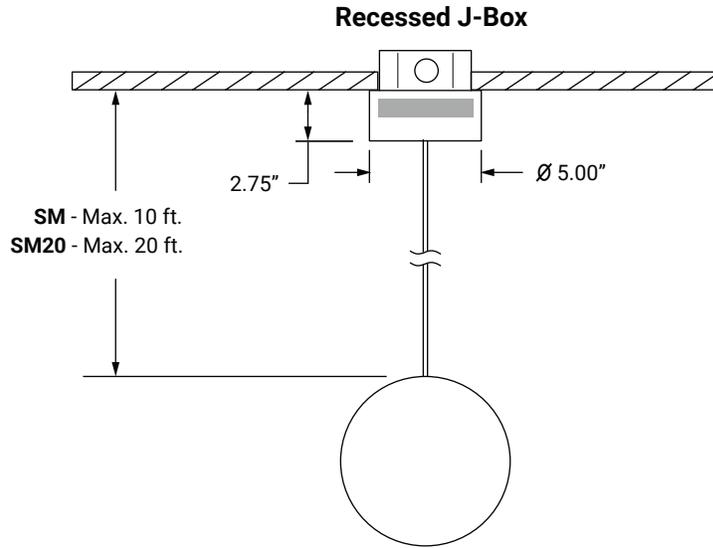


**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

|                          |                          |                         |                        |
|--------------------------|--------------------------|-------------------------|------------------------|
| <b>PURE</b><br>PUR       | <b>STONE</b><br>STN      | <b>BONE</b><br>BNE      | <b>PEACH</b><br>PCH    |
| <b>GRAY NOISE</b><br>NSE | <b>GREIGE</b><br>GRG     | <b>SAND</b><br>SND      | <b>ORANGE</b><br>ORA   |
| <b>PEBBLE</b><br>PEB     | <b>FOG</b><br>FOG        | <b>DUST</b><br>DST      | <b>BRASS</b><br>BRS    |
| <b>GRAVEL</b><br>GRV     | <b>WARM GRAY</b><br>WGR  | <b>LATTE</b><br>LTE     | <b>BRONZE</b><br>BRZ   |
| <b>SHADOW</b><br>SHD     | <b>HIPPO</b><br>HIP      | <b>CLAY</b><br>CLA      | <b>RUST</b><br>RST     |
| <b>ASPHALT</b><br>ASP    | <b>PERIWINKLE</b><br>PRW | <b>KELP</b><br>KLP      | <b>PECAN</b><br>PEC    |
| <b>ABYSS</b><br>ABS      | <b>SKY BLUE</b><br>SBL   | <b>CROCODILE</b><br>CRC | <b>FIG</b><br>FIG      |
| <b>NIGHT</b><br>NIT      | <b>SAPPHIRE</b><br>SAP   | <b>SAGE</b><br>SGE      | <b>EGGPLANT</b><br>EGP |
| <b>MIDNIGHT</b><br>MDN   | <b>NAVY</b><br>NVY       | <b>PISTACHIO</b><br>PST | <b>AMETHYST</b><br>AME |
| <b>EVERGREEN</b><br>EVG  | <b>SEAWEED</b><br>SWD    | <b>MATCHA</b><br>MCH    | <b>PLUM</b><br>PLU     |
| <b>MOSS</b><br>MOS       | <b>BAY</b><br>BAY        | <b>OLIVE</b><br>OLV     | <b>CABBAGE</b><br>CBG  |
| <b>COFFEE</b><br>CFE     | <b>SEA</b><br>SEA        | <b>GREEN</b><br>GRN     | <b>PINK</b><br>PNK     |
| <b>WINE</b><br>WIN       | <b>DARK TEAL</b><br>DTL  | <b>SUNSHINE</b><br>SUN  | <b>PASSION</b><br>PAS  |

All panels ASTM E84-16 Fire Rated

**SAMPLE FINISH**

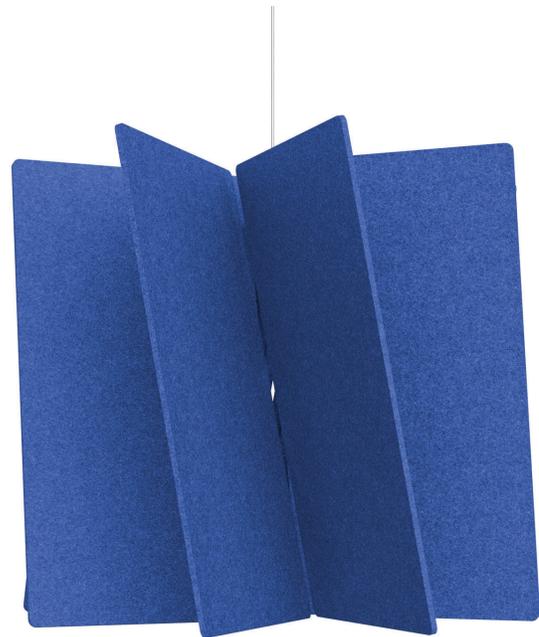

SAP



Quick ship available for any color depending on order quantity  
\*All colors are ASTM E84-16 fire rated, select colors are available as Class A

02.06.26