



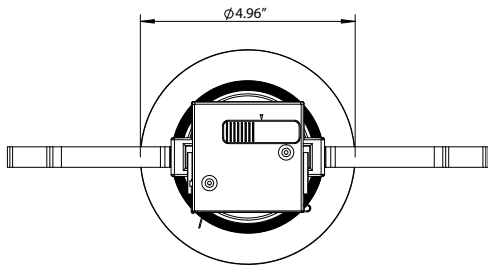

EASY 5 COLORS
SELECCTOR
2700K • 3000K • 3500K • 4000K • 5000K

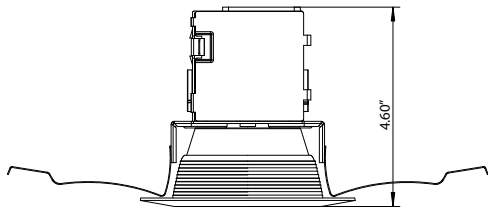

| NOMINAL LUMENS | DELIVERED LUMENS | WATTAGE |
|----------------|------------------|---------|
| 700 | 946 | 10W |

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%



INSTALLATION

Elite LED Retrofits come standard with quick connectors ready for installation in Elite Lighting's LD series recessed housing that are Energy Star and Title 24 rated (LD4IC-AT, LD5IC, LD6IC-AT).

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES

The RJL Quick Fit downlight combines a residential remodel can plus a trim in one fixture. The driver and junction box are integral to the fixture and the Quick Fit does not require a recessed housing for installation, making it ideal for applications where ceiling or top access is not available to service these luminaires. An easy 5-Color SeleCCTor switch allows the contractor to easily switch between color temperatures in the field. The Quick Fit is ideal for new construction or remodel applications including hospitality, retail, light commercial, and high-end residential.

| | |
|-------------------|----------------------------------------------------------|
| LUMENS | 700 |
| CCT | 27K/30K/35K/40K/50K |
| CRI | 90+ |
| COLOR QUALITY | 3 Step MacAdam Ellipses |
| TRIM | Baffle, Aluminum die-cast body and trim |
| REFLECTOR COLORS | WH (White) |
| FLANGE COLORS | W (White) |
| DIMMING | DIMTR (Triac) |
| LIFETIME | L70 at 50,000 Hours |
| EMERGENCY | 16W high voltage inverter (Installed into the housing)* |
| PHOTOMETRIC TESTS | In Accordance with IES LM79-08, LM80 and TM-30, TM-21 |

* Consult Factory

EASE OF INSTALLATION

Quick Fits are provided with two captive torsion springs tailored to fit in most residential housings. The Quick Fit is secured in place onto the ceiling by two retention springs and can easily be removed from the ceiling to allow for driver access. An NEC-rated junction box and driver allow for daisy-chain and feed-through wiring. Quick Fits come standard with quick connectors ready for installation.

OPTICS

Backlit LEDs are deeply regressed and shielded by a frosted diffuser lens, providing glare-free, even illumination.

CONSTRUCTION

Die-cast aluminum body for maximum heat dissipation.

EASY 5-COLOR SELECCTOR SWITCH

Easy 5-Color SeleCCTor switch can be adjusted to a choice of 5 different Kelvin color temperatures in the field. Options include 27K/30K/35K/40K/50K. The SeleCCTor switch is located on the junction box for easy adjustment before and after installation. The SeleCCTor switch is easily accessible by lowering the luminaire from the opening.

FLEXIBILITY – MULTIPLE APERTURES, TRIM TYPES AND FINISHES

Quick Fit is available in 4", 5", 6", and 8" in round and square apertures. Trim options include reflector, baffle, and adjustable in round or square. Product is shipped standard with white finish and available in a variety of trim rings that are field-installable (Black, Satin Nickel, Copper, and Bronze) for maximum design flexibility.

NO HOUSING REQUIRED FOR INSTALLATION

Quick Fit can be installed in the ceiling without a recessed housing. A cut-out template sticker is provided for ease of installation.

DRIVER ELECTRICAL INFORMATION

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

DIMMING & DRIVER INFORMATION

DIMTR - Triac & electronic low voltage (DIMTR-120) dimming. Available in 120V. Dimmable down to 10% of initial lumens, standard.

APPLICATIONS


Damp and wet-location-rated ideal for indoor and outdoor use, shower, and other wet-location applications. IC-Rated and Air Tight and may be installed in direct contact with insulation.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

Energy Star
cETLus
Title 24
JA8
IC Rated
RoHS
IECC
New York State

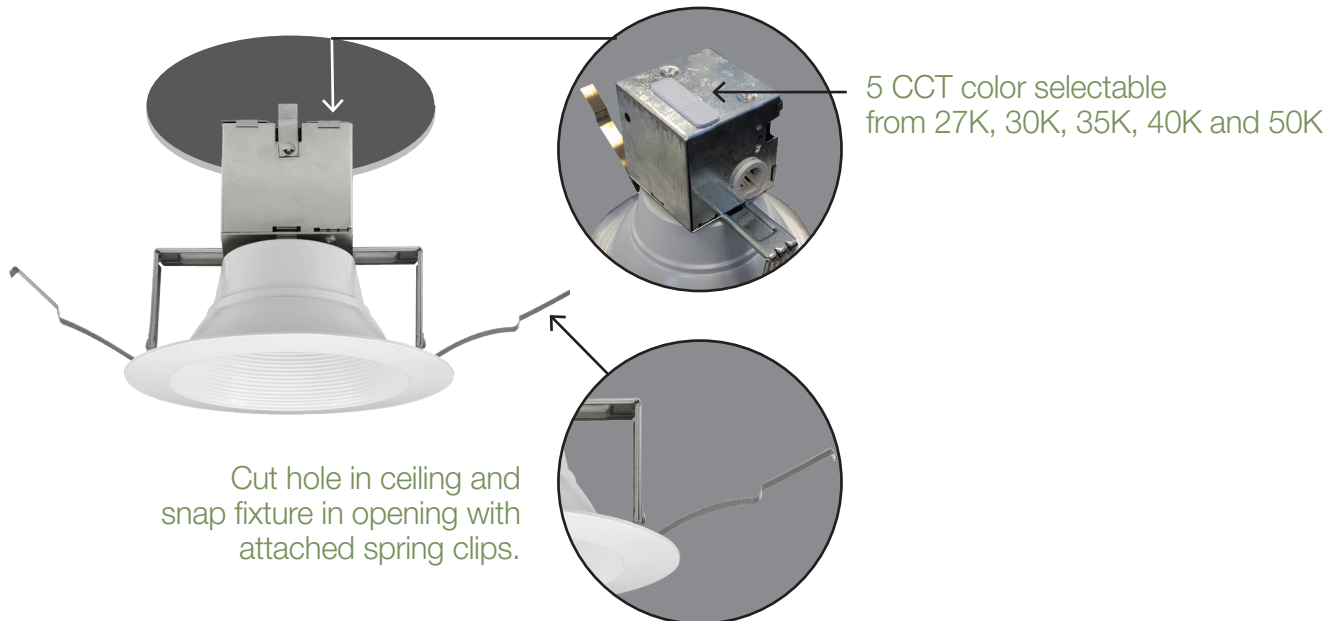

EXAMPLE: RJL437-700L-DIMTR-120-30K-90-W-WH

| TYPE | LUMEN | CCT | CRI | FINISH |
|--------|----------------|---------------------|-----|------------|
| RJL437 | 700L-DIMTR-120 | 27K/30K/35K/40K/50K | 90+ | W-WH-White |

RJL437-700L-DIMTR-120-27K-30K-35K-40K-50K-90-W-WH

TEST NO.: **EL01142044**

INPUT WATTS: **10**

LUMENS: **946**


CRI: **90**

EFFICACY: **88**

CCT: **2700K**

SPACING CRITERIA: **1.00**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

| Zone | Lumens | %Lamp | %Fixt |
|------|--------|-------|-------|
| 0-20 | 253.51 | 26.8 | 26.8 |
| 0-30 | 494.8 | 52.3 | 52.3 |
| 0-40 | 703.83 | 74.4 | 74.4 |
| 0-60 | 903.44 | 95.5 | 95.5 |
| 0-80 | 945.3 | 99.9 | 99.9 |
| 0-90 | 945.33 | 99.9 | 99.9 |

Luminance (Average candela/M²)

| Angle in Degrees | Average 0° | Average 45° | Average 90° |
|------------------|------------|-------------|-------------|
| 45 | 86188 | 89010 | 92191 |
| 55 | 43226 | 44735 | 46997 |
| 65 | 27053 | 28065 | 29936 |
| 75 | 2407 | 5290 | 10382 |
| 85 | 79 | 79 | 79 |

Lumens Per Zone

| Zone | Lumens |
|-------|--------|
| 0-10 | 67.96 |
| 10-20 | 185.55 |
| 20-30 | 241.29 |
| 30-40 | 209.03 |
| 40-50 | 132.49 |
| 50-60 | 67.12 |
| 60-70 | 34.06 |
| 70-80 | 7.8 |
| 80-90 | 0.02 |

Candela Tabulation

| 0 | 0 |
|----|--------|
| 0 | 725.03 |
| 5 | 719.2 |
| 15 | 662.61 |
| 25 | 533.13 |
| 35 | 347.56 |
| 45 | 178.04 |
| 55 | 72.43 |
| 65 | 33.4 |
| 75 | 1.82 |
| 85 | 0.02 |
| 90 | 0.02 |

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| Cone of Light | | | |
|-------------------------|----------------------------------|-------------------------|--------------------------|
| 2 | 251 | 2.3 | 2.3 |
| 4 | 66.6 | 4.4 | 4.4 |
| 6 | 29.0 | 6.7 | 6.7 |
| 8 | 16.2 | 8.9 | 9.0 |
| 10 | 10.5 | 11.1 | 11.0 |
| 12 | 7.25 | 13.4 | 13.3 |
| (FT.) Distance to Plane | (FC) Initial Footcandle at Nadir | (FT.) Beam Vert. Spread | (FT.) Beam Horiz. Spread |

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

| | RC | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 10% | | | | 0% |
|-------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|----|
| | RW | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% | | | |
| ROOM CAVITY RATIO | 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| | 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 97 | 96 | 95 | 94 | 93 | 91 | | | |
| | 2 | 105 | 99 | 95 | 90 | 103 | 98 | 93 | 89 | 94 | 91 | 87 | 91 | 88 | 85 | 88 | 86 | 84 | 82 | | | |
| | 3 | 99 | 91 | 85 | 80 | 96 | 89 | 84 | 79 | 87 | 82 | 78 | 80 | 77 | 72 | 78 | 76 | 74 | 72 | | | |
| | 4 | 92 | 83 | 77 | 72 | 90 | 82 | 76 | 71 | 80 | 74 | 70 | 78 | 73 | 69 | 76 | 72 | 68 | 67 | | | |
| | 5 | 87 | 77 | 70 | 64 | 85 | 76 | 69 | 64 | 74 | 68 | 64 | 72 | 67 | 63 | 70 | 66 | 62 | 61 | | | |
| | 6 | 81 | 71 | 64 | 59 | 80 | 70 | 63 | 58 | 68 | 62 | 58 | 67 | 61 | 57 | 65 | 61 | 57 | 55 | | | |
| | 7 | 76 | 66 | 58 | 54 | 75 | 65 | 58 | 53 | 63 | 57 | 53 | 62 | 57 | 53 | 61 | 56 | 52 | 51 | | | |
| | 8 | 72 | 61 | 54 | 49 | 71 | 60 | 54 | 49 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 48 | 47 | | | |
| | 9 | 68 | 57 | 50 | 45 | 67 | 56 | 50 | 45 | 55 | 49 | 45 | 54 | 49 | 45 | 53 | 48 | 45 | 43 | | | |
| 10 | 64 | 53 | 47 | 42 | 63 | 53 | 46 | 42 | 52 | 46 | 42 | 51 | 46 | 42 | 50 | 45 | 42 | 40 | | | | |

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance