


EASY 5 COLORS  
**SELECTOR**  
2700K • 3000K • 3500K • 4000K • 5000K

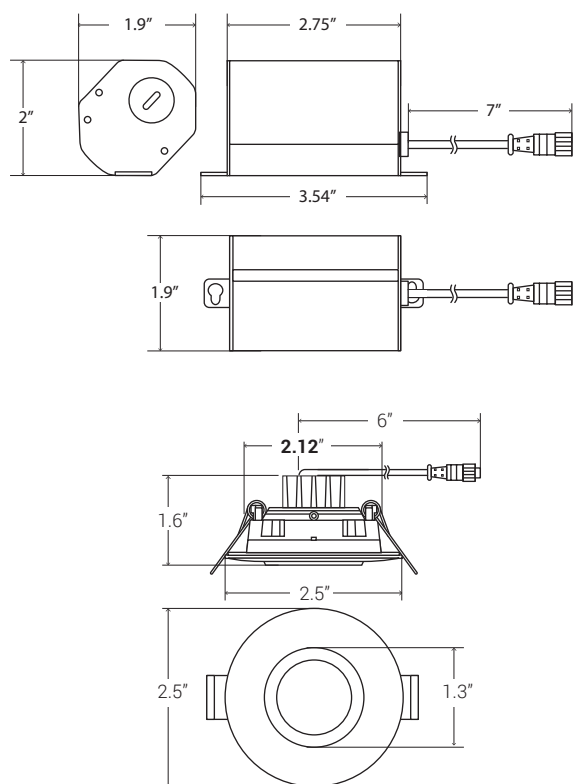

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
360	384	5W

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

#### INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3\".

#### FEATURES

LED adjustable gimbal downlight engineered for new construction, with 360-degree rotation and 30-degree tilt. Ideal where ceiling or top access is not available to service the luminaire. Eliminates the need for recessed housing. Ideal for residential, retail, and office spaces.

LUMENS	360
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Adjustable
BEAM ANGLE	30 Degrees
DISTRIBUTION	MD- Medium Distribution
COLORS	WH (White-standard)
DIMMING	DIMTR (Triac)
EMERGENCY	16W high voltage inverter ( remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-Rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in applications with 1 1/2\" or more of plenum clearance.
- May be installed in drywall or suspended ceilings.
- 90 CRI standard.
- Flicker-free 120V forward-phase Triac dimming down to 5%.
- Even illumination of luminaire is achieved by utilizing patent-pending optics along with edgelit technology.
- Aluminum die-cast body and trim.

## SLIM TRIM



EXAMPLE: **RL173-360L-DIMTR-120-27K/30K/35K/40K/50K-90-WH**

TYPE	LUMEN	CCT	CRI	DISTRIBUTION	FINISH
RL173	<input type="checkbox"/> 360L-DIMTR-120	<input type="checkbox"/> 27K/30K/35K/40K/50K	<input type="checkbox"/> 90+	<input type="checkbox"/> MD - Medium Distribution	<input type="checkbox"/> WH-White

## ACCESSORIES



**RL-ACC-SLIM-1-10F**  
10-ft long extension



**RL-ACC-SLIM-1-20F**  
20-ft long extension

EXAMPLE: **RL-ACC-SLIM-1-10F**

OPTIONS
<input type="checkbox"/> <b>RL-ACC-SLIM-1-10F</b> - 10ft Long Extension
<input type="checkbox"/> <b>RL-ACC-SLIM-1-20F</b> - 20ft Long Extension