





**MULTILUMEN  
SELECTOR**

**EASY 5 COLORS  
SELECCTOR**  
2700K • 3000K • 3500K • 4000K • 5000K



## DIMENSIONS

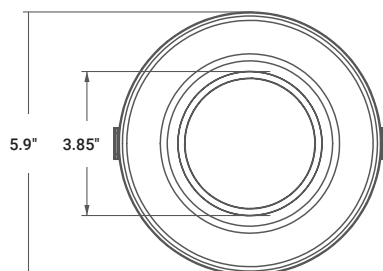

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
2000	2000	18W
1500	1500	15W
1000	1000	10W

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000	1000	10W
700	700	7W
500	500	5W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

## INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire.

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.



## FEATURES

4" round multi-CCT LED "Canless Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 3 lumen output and 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	500/700/1000L 1000/1500/2000L
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Reflector
TRIM COLORS	WH (White), SHZ (Satin Haze), CL(Chrome), BK (Black)
DIMMING	DIM10 ( 0-10V dim down to 10%)
EMERGENCY	16W high voltage inverter ( remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TEST	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- Even illumination achieved with patent-pending optics and edge-lit LED technology.
- Ideal where ceiling or top access is unavailable.

## TRIM

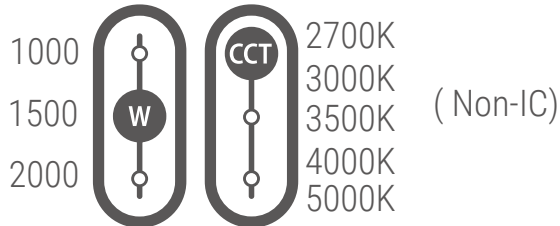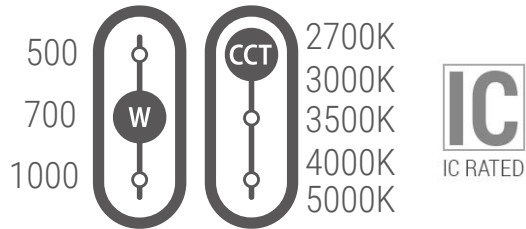

## BAFFLE TRIMS



RL443-BT-MB-BK  
Black-black




RL443-BT-SHZ-SHZ  
Satin haze-satin haze



RL443-BT-SHZ-WH  
Satin haze-white

## REFLECTOR TRIMS



RL443-RT-MB-BK  
Black-black



RL443-RT-SHZ-SHZ  
Satin haze-satin haze



RL443-RT-SHZ-WH  
Satin haze-white






RL443-RT-CL-WH  
Clear-white

## EXAMPLE:

RL443-500L/700L/1000L-DIM10-MVOLT-27K/30K/35K/40K/50K-90-WH

TYPE	LUMEN	CCT	CRI	FINISH
RL443	<input type="checkbox"/> 500L/700L/1000L-DIM10-MVOLT <input type="checkbox"/> 1000L/1500L/2000L-DIM10-MVOLT	<input type="checkbox"/> 27K/30K/35K/40K/50K	<input type="checkbox"/> 90+	<input type="checkbox"/> WH - White (Standard) <input type="checkbox"/> RL443-RT-SHZ-SHZ - Satin Haze-Satin Haze <input type="checkbox"/> RL443-RT-SHZ-WH - Satin Haze-White <input type="checkbox"/> RL443-RT-CL-WH - Chrome-White <input type="checkbox"/> RL443-RT-MB-BK - Black-Black <input type="checkbox"/> RL443-BT-SHZ-SHZ - Satin Haze-Satin Haze <input type="checkbox"/> RL443-BT-SHZ-WH - Satin Haze-White <input type="checkbox"/> RL443-BT-MB-BK - Black-Black

## ACCESSORIES

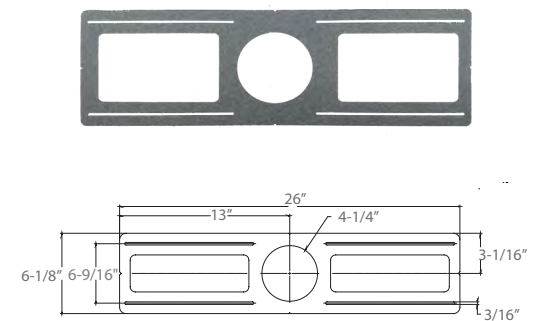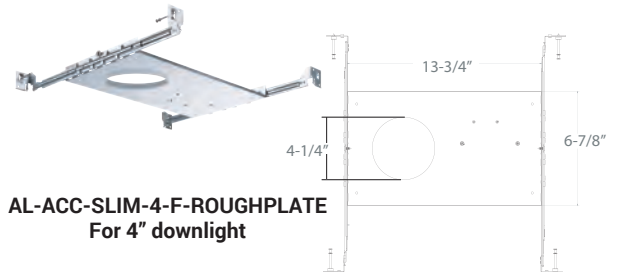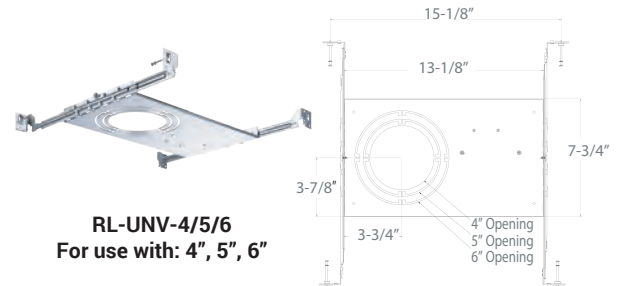

## RL-UNV-4/5/6

OPTIONS
<input type="checkbox"/> RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6" <input type="checkbox"/> RL-ACC-SLIM-4-F-ROUGHPLATE - 4" Mounting Plate <input type="checkbox"/> AL-ACC-SLIM-4-F-ROUGHPLATE - 4" Flanged Roughplate