



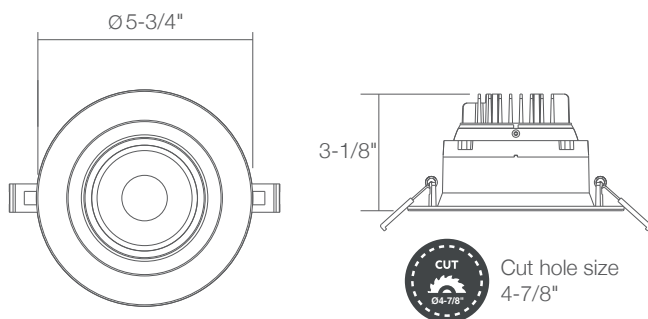

**EASY 5 COLORS
SELECCTOR**
2700K • 3000K • 3500K • 4000K • 5000K

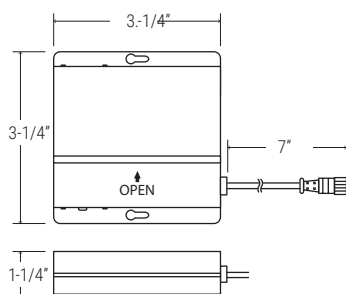

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000	1000	11W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES

4" round multi-CCT LED "Slim Disk" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	1000
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Gimbal (30° Tilt)
TRIM COLORS	WH (White)
DIMMING	DIMTR (Triac)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- Flicker-free 120V forward-phase Triac dimming down to 5%.
- Even illumination achieved with patent-pending optics and edge-lit LED technology.
- Ideal where ceiling or top access is unavailable.
- Five-year warranty for parts and components. (Labor not included)

SLIM TRIM






ACCESSORIES



RL-ACC-SLIM-1-10F
10-ft long extension



RL-ACC-SLIM-1-20F
20-ft long extension

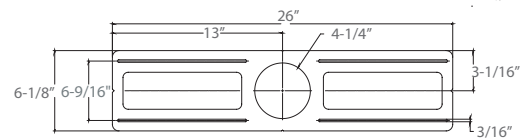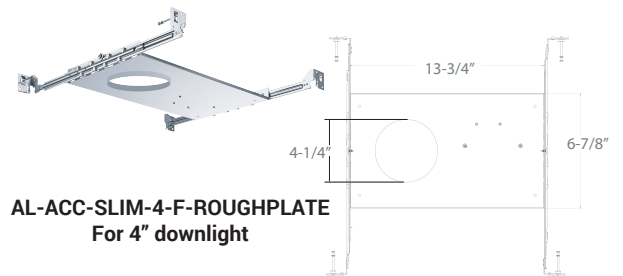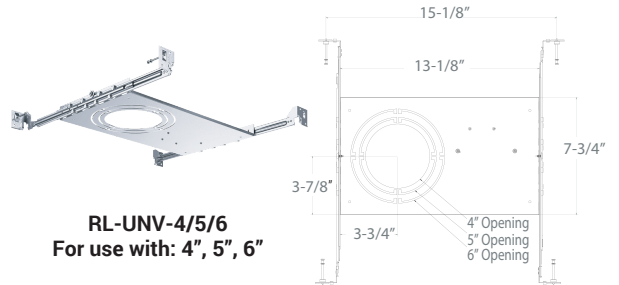

RL-ACC-SLIM-4-ROUGHPLATE
Rough-in plate for use with 4" downlights

EXAMPLE:
RL472-1000L-DIMTR-120-27K/30K/35K/40K/50K-90-MD-WH

TYPE	LUMEN	CCT	CRI	DISTRIBUTION	FINISH
RL472	<input type="checkbox"/> 1000L-DIMTR-120	<input type="checkbox"/> 27K/30K/35K/40K/50K	<input type="checkbox"/> 90+	<input type="checkbox"/> MD - Medium Distribution	<input type="checkbox"/> WH - White (Standard)

RL-ACC-SLIM-1-10F

OPTIONS

- ☐ **RL-ACC-SLIM-1-10F** - 10ft Long Extension
- ☐ **RL-ACC-SLIM-1-20F** - 20ft Long Extension
- ☐ **RL-UNV-4/5/6** - Universal Mounting Plate for 4", 5" and 6"
- ☐ **RL-ACC-SLIM-4-ROUGHPLATE** - 4" Mounting Plate
- ☐ **AL-ACC-SLIM-4-F-ROUGHPLATE** - 4" Flanged Roughplate