




EASY 5 COLORS
SELECTOR
2700K • 3000K • 3500K • 4000K • 5000K

DIMENSIONS

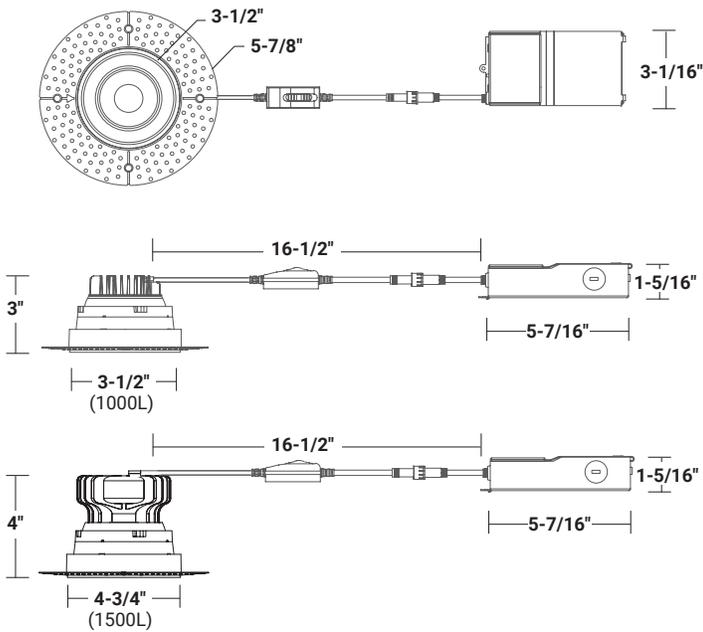

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000L	1153L	11W
1500L	1795L	17W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

For wet location application, you **MUST** seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements. Installation hole size: 4-3/4"

FEATURES

SEAMLESS INTEGRATION, RADIANT ILLUMINATION

This 4" LED gimbal features a trimless design, 30° tilt, and 360° rotation for dynamic illumination. A regressed lens and smooth reflector make for radiant, glare-free light, while 5 selectable CCT allows for versatile atmospheres. Engineered for new construction, remodel, or retrofit applications and accommodates insulated and dropped ceilings. Ideal for use in lobbies, showrooms, offices, hallways and more in corporate, residential, commercial, retail, healthcare and hospitality spaces. No housing or driver necessary. Wet location and IC rated.

LUMENS	1000L, 1500L
CCT	27K/30K/35K/40K/50K
CRI	90+ Standard
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Recessed Trimless
DIMMING	DIMTR - 10% Triac Dimming
BEAM ANGLE	MD (Medium, 38°), ND (Narrow, 24°) and WD (Wide, 60°)
FINISH	White (W-WH)
WORKING TEMP.	-20°C (-4°F) to 40°C (104°F)
UGR	UGR<19
EMERGENCY	16W High Voltage Inverter (Remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21

- Small aperture and shallow depth allow for unlimited applications.
- Wet location suitable.
- Airtight and IC rated for direct contact with insulation.
- Remote driver; no housing or jbox necessary.



OPTICS

Features a slightly regressed polycarbonate lens and smooth reflector for uniform, low-glare illumination. A 30° tilt, and 360° rotation allow for directional, dynamic illumination.

Available in lumen packages of 1000L or 1500L and 5 selectable color temperatures of 2700K/3000K/3500K/4000K/5000K enable different warm to cool moods and atmospheres. CCT factory set to 5000K.

A CRI value of 90 guarantees vibrant, natural color display, while a 38° beam angle makes for a Medium (MD) distribution.

Additional 24° and 60° TIR optics available to order separately.

CONSTRUCTION

A durable, die-cast aluminum body allows for lightweight installation and thermal regulation. A twist and lock module design allows for easy mounting. A small aperture and shallow depth allow for unlimited applications.

Perforated mesh cover designed for a seamless drywall or plaster mud-in.

Remote steel driver/junction box included. Multi-CCT switch located on cord for remote driver.

Airtight, wet location and IC rated. Available in a white finish.

MAINTENANCE

Fixture can be regularly and safely wiped down to ensure optimal fixture performance.

MOUNTING

Suitable for recessed mounting. Recommended hole cut-out size is 4-3/4".

OPTIONS & ACCESSORIES

Available to order separately:

- 16W emergency battery back-up option
- Optional TIR optics: Narrow (ND) at 24° and Wide (WD) distribution at 60°

Extension cable options:

- RL-ACC-SLIM-1-10F (10-ft)
- RL-ACC-SLIM-1-20F (20-ft)

Rough Plate options:

- RL-UNV-4/5/6 for use with 4", 5", and 6" downlights.
- RL-UNV-1/2/3/4/5/6/8/10 - Universal Mounting Plate for 1", 2", 3", 4", 5", 6", 8" and 10" downlights
- AL-ACC-SLIM-4-F-ROUGHPLATE for use with 4" downlights
- RL-ACC-SLIM-4-ROUGHPLATE for use with 4" downlights

See order chart for details.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120V-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING

DIMTR - 10% Triac dimming at 120V.


WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

ETL listed.
Energy Star certified.
JA8 and Title 20 compliant.
Wet location suitable.
IC-Rated, air-tight ready, and may be in direct contact with insulation.

MULTI-CCT SWITCH

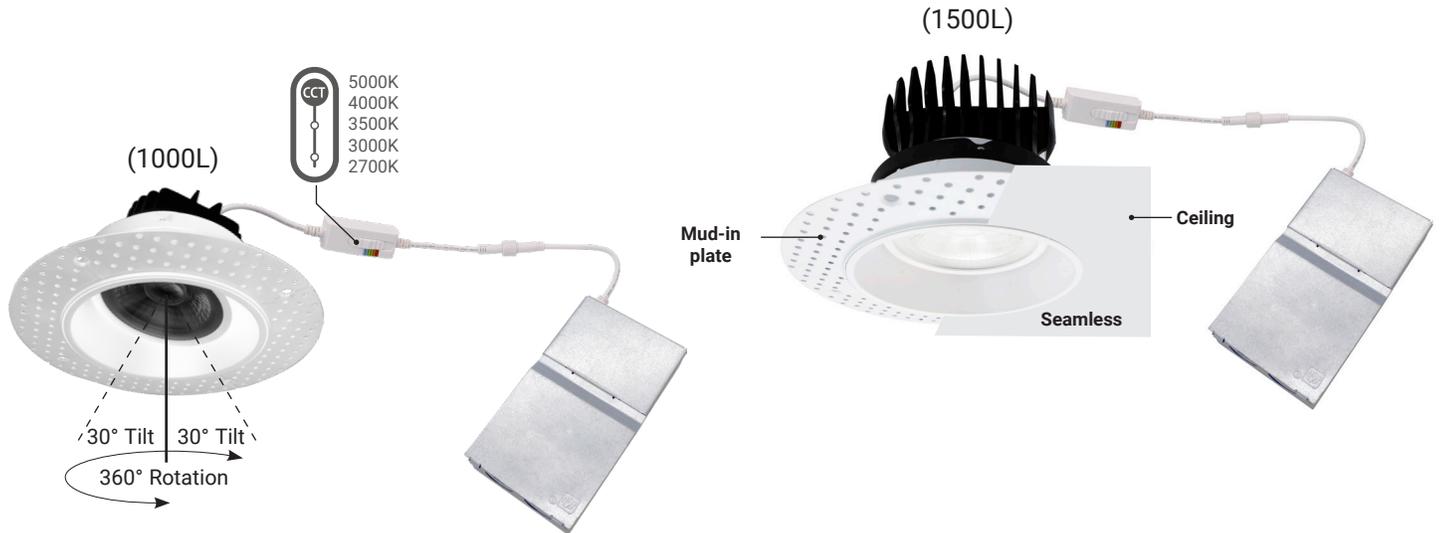



OPTION & ACCESSORIES



RL-ACC-SLIM-1-10F
10-ft long extension


RL-ACC-SLIM-1-20F
20-ft long extension

RL-ACC-SLIM-4-ROUGHPLATE
For 4" downlights

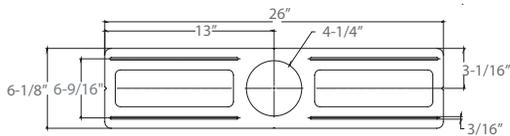


RL-UNV-1/2/3/4/5/6/8/10


For use with 1", 2", 3", 4", 5", 6", 8", and 10" downlights

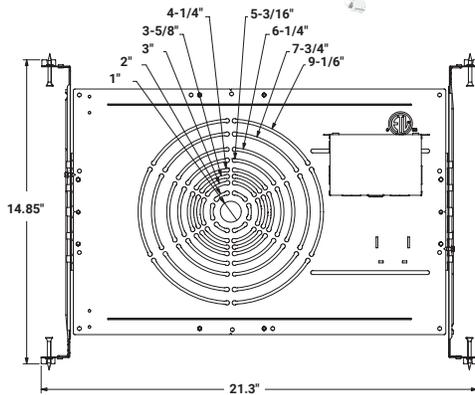

RL-UNV-4/5/6
For use with 4", 5", and 6" downlights

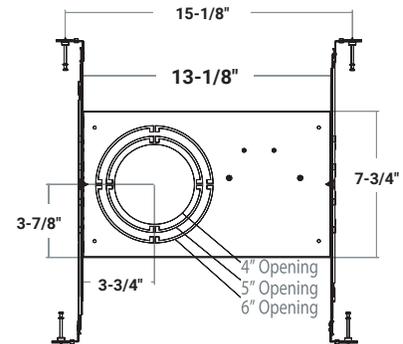

AL-ACC-SLIM-4-ROUGHPLATE
For 4" downlights

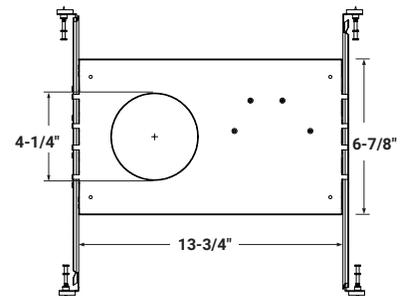

Example: **RL472-TL-1000L-DIMTR-120-27K/30K/35K/40K/50K-90-W-WH**

SERIES	LUMENS	DIMMING	CCT	CRI	FINISH	TIR OPTICS	OPTION
RL472-TL	1000L 1500L	DIMTR/120 - Triac	27K/30K/35K/40K/50K	90	W-WH - White	ND (24°) MD (38°) - Included Standard WD (60°)	RL-ACC-SLIM-1-10F - 10-ft long extension RL-ACC-SLIM-1-20F - 20-ft long extension RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6" RL-UNV-1/2/3/4/5/6/8/10 - Universal Mounting Plate for 1", 2", 3", 4", 5", 6", 8" and 10" AL-ACC-SLIM-4-F-ROUGHPLATE - 4" Flanged Roughplate RL-ACC-SLIM-4-ROUGHPLATE - 4" Mounting Plate O-EMG-LED-16W-FLEX - 16W Emergency Back up (Remote)

