




## DIMENSIONS

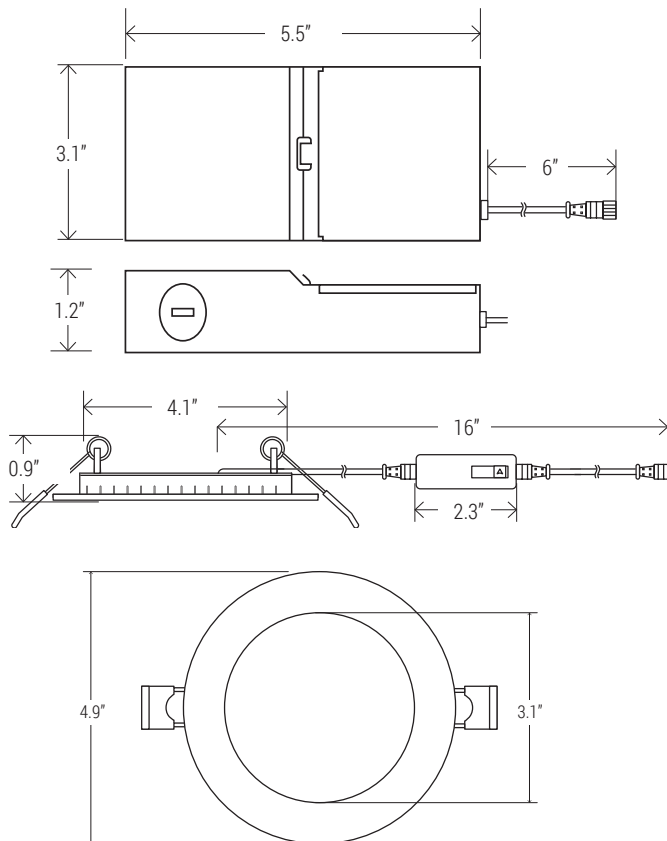

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
600	600	9W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

## INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You **MUST** seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

## FEATURES

Night Light LED Slim Disk with Color temperature selectable from 2700 to 5000K for easy installation and configuration. The night light ring provides a CCT of 2000K for a warm application. This is the perfect lighting solution for bedrooms or hotels rooms.

LUMENS	600
CCT	Downlight CCT- 27K/30K/35K/40K/50K Night Light CCT (Side Ring) - 20K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
COLORS	White
DIMMING	DIMTR ( Triac Dimming)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- Without recessed cans or a separate j-box
- CRI 90 for true color rendering
- No flicker
- Smooth triac dimming from 100% to 10% with most modern LED dimmers
- 80% more energy savings than halogen lamps.
- Suitable for most new constructions.
- ETL Listed. Energy Star. Title24
- 5 Years warranty

## SLIM TRIM



EXAMPLE: RL475-NL-600L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

TYPE	LUMEN	CCT	CRI	FINISH
RL475-NL	600L-DIMTR-120	27K/30K/35K/40K/50K	90+	WH - White


## ACCESSORIES




**RL-ACC-SLIM-1-10F**  
10-ft long extension




**RL-ACC-SLIM-1-20F**  
20-ft long extension

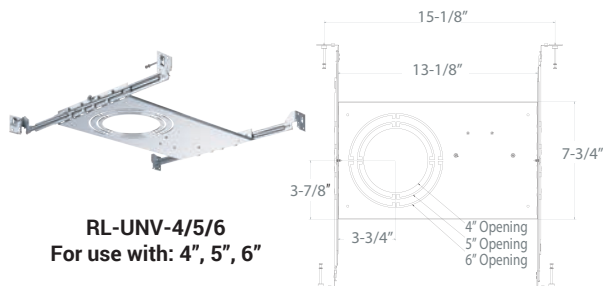

**RL-UNV-4/5/6**  
For use with: 4", 5", 6"

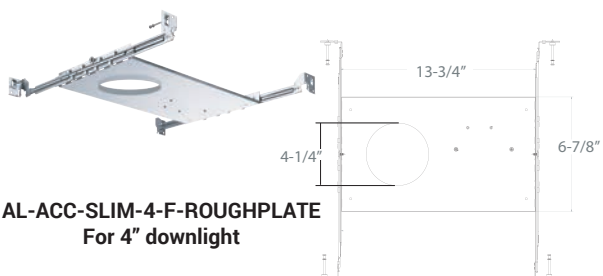

**AL-ACC-SLIM-4-F-ROUGHPLATE**  
For 4" downlight

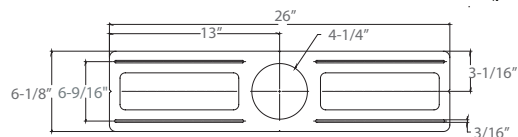

**RL-ACC-SLIM-4-ROUGHPLATE**  
Rough-in plate for use with 4" downlights

## RL-ACC-SLIM-1-10F

### OPTIONS

- ☐ **RL-ACC-SLIM-1-10F** - 10ft Long Extension
- ☐ **RL-ACC-SLIM-1-20F** - 20ft Long Extension
- ☐ **RL-UNV-4/5/6** - Universal Mounting Plate for 4", 5" and 6"
- ☐ **RL-ACC-SLIM-4-ROUGHPLATE** - 4" Mounting Plate
- ☐ **AL-ACC-SLIM-4-F-ROUGHPLATE** - 4" Flanged Roughplate