





EASY 5 COLORS
SELECCTOR
2700K • 3000K • 3500K • 4000K • 5000K



NEW
ADJUSTABLE
DESIGN

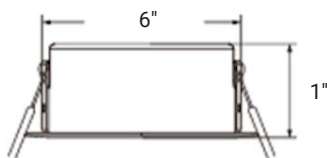

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
800	807	15W
600	600	11W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You **MUST** seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES

6" round multi-CCT LED "Adjustable Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	650/800
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Adjustable
TRIM COLORS	WH (White)
DIMMING	DIMTR (Triac), DIM10 (0-10V Dimming)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- Flicker-free 120V forward-phase dimming down to 5%.
- 0-10V Dimming
- Even illumination achieved with patent-pending optics and edge-lit LED technology.
- Ideal where ceiling or top access is unavailable.

TRIM



EXAMPLE:
RPL664-650L/800L-DIMTR/120-DIM10 MVOLT-120-27K/30K/35K/40K/50K-90-WH

TYPE	LUMEN	CCT	CRI	FINISH
RPL664	650L/800L-DIMTR/120-DIM10/MVOLT	27K/30K/35K/40K/50K	90+	WH - White

ACCESSORIES




RL-ACC-SLIM-1-10F
10-ft long extension





RL-ACC-SLIM-1-20F
20-ft long extension



RL-UNV-4/5/6
For use with: 4", 5", 6"
Universal mounting plate

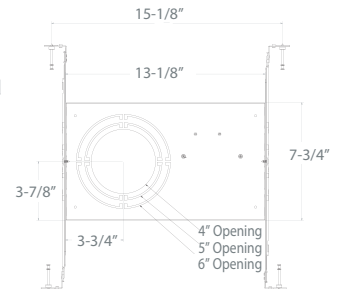

AL-ACC-SLIM-6-F-ROUGHPLATE
For use with: 6" downlights

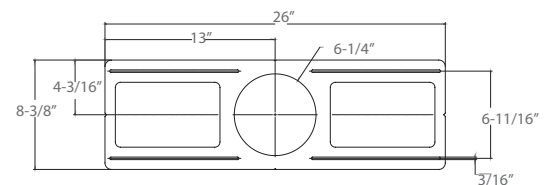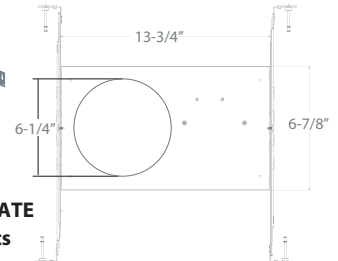

RL-ACC-SLIM-6-ROUGHPLATE
Rough-in plate for use with 6" downlights

RL-ACC-SLIM-1-10F

OPTIONS

- ☐ RL-ACC-SLIM-1-10F - 10ft Long Extension
- ☐ RL-ACC-SLIM-1-20F - 20ft Long Extension
- ☐ RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6"
- ☐ RL-ACC-SLIM-6-F-ROUGHPLATE - 6" Mounting Plate
- ☐ AL-ACC-SLIM-6-F-ROUGHPLATE - 6" Flanged Roughplate