



LIGHT SOURCE

E26 Socket (1xA19 not included), No Light Source (NLS)

VOLTAGE

120V

CORD / CANOPY COLOR

WH (White), BK (Black)

MATERIAL COLORS

Refer to SoftSense T-Material Color Chart

"Shade" are acoustic pendant or suspended fixtures that can be ordered with an LED light source or an E26 socket to fit an A19 bulb. These aesthetically pleasing lampshades allow you to adjust the reverberation rate and brightness of your space. Hang them around open-concept areas to minimize distractions, increase focus, and bring a peace for everyone.

Dome - A suspended acoustic lampshade defined by its smooth, rounded profile and balanced proportions. The curved form helps soften both sound and glare, creating a calm, evenly diffused lighting effect. Designed for use with standard E26 lamps, Dome offers a clean, versatile aesthetic that integrates easily into a wide range of interior environments while contributing to overall acoustic comfort.

MOQ REQUIRED




0210.20

Example: **SHADE-SOFT-DOME-M-E26-120-BK-BK-T-GRN**

SHADE- SOFT							
SERIES SHADE- SOFT SoftSense Suspended Lampshade	STYLE DOME - Dome <small>MOQ - minimum order quantity required</small>	SIZE M - Medium	LIGHT SOURCE E26 - E26 Socket for Bulb NLS ² - no light source	VOLTAGE 120 - 120 Volt	CANOPY¹ WH - White BK - Black	CORD¹ WH - White BK - Black	COLOR reference SoftSense (thermoformed) t-material color chart example: T-GRN - Green

¹ Consult factory for custom color
² please skip to canopy color

DIMENSIONS

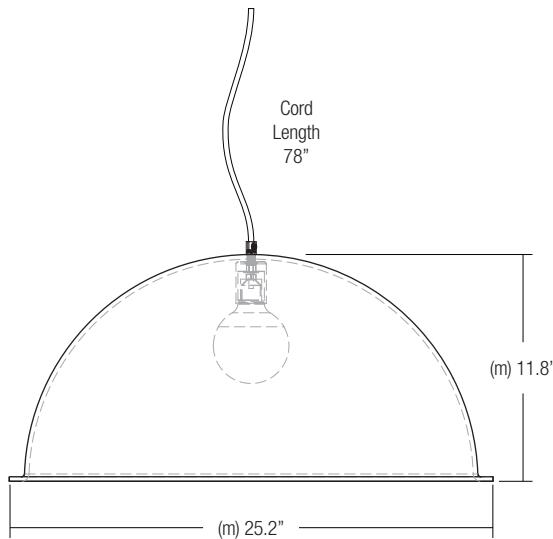

ACOUSTIC MATERIAL

Made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes. While made from the same materials as our acoustic panels, this product features a thinner acoustic that has been thermoformed into shape, resulting in a firmer, more rigid texture.

WELL FOR SOUND

This luminaire is recommended for use as an acoustical absorption surface to limit reverberation times (RT) in a given space. This luminaire contributes to noise reduction and vibration dampening to promote focus and concentration. Reverberation needs to be calculated in each space based on the materials used.

PRODUCT SPECIFICS (exact size in mm)

Medium - diameter: 25.2" (640), height: 11.8" (300)

MAINTENANCE / CARE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

WARRANTY

Limited 5-year Warranty. (Labor not included.) Please consult factory.


LISTINGS

ETLus Listed to UL1598 (Suitable for dry locations only). Max 60W.

ASTM E-84 Fire Rated (acoustic only)


SCS Recycled Content Certified (acoustic only)

NO LIGHT SOURCE

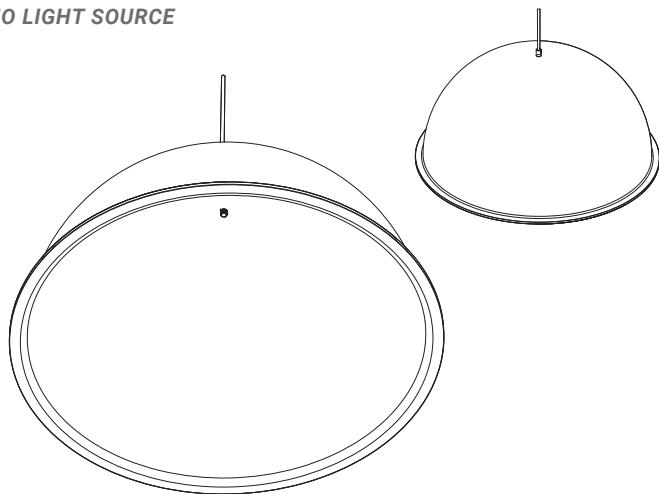

RETROFIT LIGHTING - fits any standard E26 Bulb. (Bulb not included.)

1 x A19/Medium (E26)/100W/120V Incandescent
1 x A19/Medium (E26)/120V LED

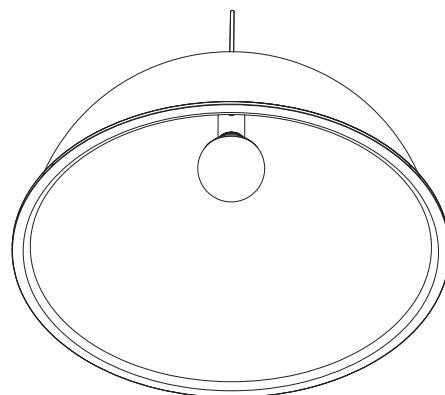

SOFTSENSE T-MATERIAL COLOR CHART

Thermoformed Panel Thickness: 6 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated



colors with the same name from this rigid felt material will not be a perfect match to our standard panel colors
*all colors are ASTM E84-16 fire rated