



LIGHT SOURCE	LED, E26 Socket (1x A19 not included), No Light Source (NLS)	EMERGENCY <small>(REMOTE / LED ONLY)</small>	10W - Up to 1000L Output (Bodine BSL310) 20W - Up to 2000L Output (Bodine BSL20)
LUMENS <small>(LED ONLY)</small>	1700, 2500, 3000, 3500, 4000, 4500, 5000	OPTICS <small>(LED ONLY)</small>	NSPD (15°), SPD (24°), MD (36°), MWD (50°)
CCT <small>(LED ONLY)</small>	2700K, 3000K, 3500K, 4000K	FRAME FINISH	WH (White), BK (Black), RD (Red)
CRI <small>(LED ONLY)</small>	90+	CORD / CANOPY COLOR	WH (White), BK (Black)
COLOR QUALITY <small>(LED ONLY)</small>	2 Step MacAdam Ellipse	STITCH COLOR	BK (Black), WH (White), RD (Red)... (all options shown on p4)
DIMMING & CONTROLS <small>(LED ONLY)</small>	0-10V Flicker Free 1% Dimming Standard (DIM10), Triac Dimming (DIMTR)	MATERIAL COLORS	Refer to SoftSense Material Color Chart (p4)

“Shade” are acoustic pendant or suspended fixtures that can be ordered with an LED light source or an E26 socket to fit an A19 bulb. These aesthetically pleasing lampshades allow you to adjust the reverberation rate and brightness of your space. Hang them around open-concept areas to minimize distractions, increase focus, and bring a peace for everyone.

The “Stitch-PL” is a pleated version of our classic Stitch fixture that utilizes our standard acoustic panels to give you access to our full range of vibrant colors and prints. Additionally, the side stitching can be customized in various color options, allowing you to tailor the fixture to perfectly complement your space.




Example: **SHADE-SOFT-STITCH-PL-S-1750L-DIM10-MVOLT-SPD-35K-90-RD-BK-BK-RD-GRN**

SHADE-SOFT																	
SERIES SHADE-SOFT SoftSense Suspended Lampshade	STYLE STITCH-PL - Stitch w/ pleats	SIZE S - Small	LUMENS 1750L - 1750 Lumens 2500L - 2500 Lumens 3000L - 3000 Lumens 3500L - 3500 Lumens 4000L - 4000 Lumens 4500L - 4500 Lumens 5000L - 5000 Lumens E26 ² - E26 Socket for Bulb NLS ² - no light source	DRIVER DIM10 - 0-10V Dimming DIMTR ³ - Triac Dimming	VOLTAGE MVOLT - 120-277Vac 120 - 120 Volt	OPTICS NSPD - 15 degrees SPD - 24 degrees MD - 36 degrees MWD - 50 degrees	CCT 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	CRI 90	EMERGENCY* 0-EMG-LED-10W 0-EMG-LED-20W	FRAME FINISH¹ WH - White BK - Black RD - Red	CANOPY¹ WH - White BK - Black	CORD¹ WH - White BK - Black	STITCH COLOR refer to "stitching color chart" for all options BK - Black WH - White GV - Gravel ST - Stone RD - Red	FELT COLOR reference SoftSense material color chart example: GRN - Green			



- 1 Consult factory for custom color
 - 2 please skip to frame finish
 - 3 DIMTR available in 120V only
- * remote mount only

DIMENSIONS

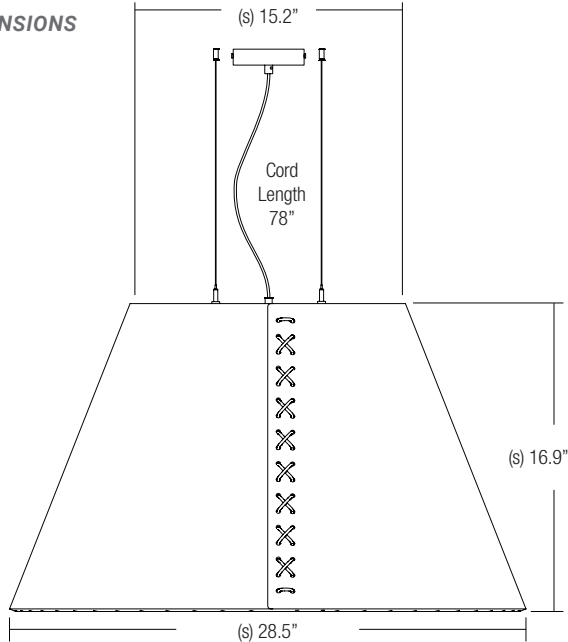

WELL FOR SOUND

This luminaire is recommended for use as an acoustical absorption surface to limit reverberation times (RT) in a given space. This luminaire contributes to noise reduction and vibration dampening to promote focus and concentration. Reverberation needs to be calculated in each space based on the materials used.

PRODUCT SPECIFICS (exact size in mm)

Small - top: 15.2" (386), bottom: 28.5" (724), height: 16.9" (428)

MAINTENANCE / CARE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

WARRANTY

Limited 5-year Warranty. (Labor not included.) Please consult factory.

LISTINGS

UL Listed for Dry / Damp location
ASTM E-84 Fire Rated
SCS Recycled Content Certified

CONSTRUCTION

This pleated version of the Stitch fixture is constructed using standard acoustic panels, secured with durable polyester stitching and mounted on a precision laser-cut steel frame. This frame is designed to accommodate both suspension systems and integrated lighting. Lighting options include an LED module mounted to the frame or an E26 bulb socket.

To achieve the distinctive curvature of the panels, precisely spaced V-shaped grooves are expertly cut into the inner surface, penetrating nearly halfway through the material. This innovative technique allows for smooth, controlled bending while preserving the integrity of the acoustic structure.

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.


Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

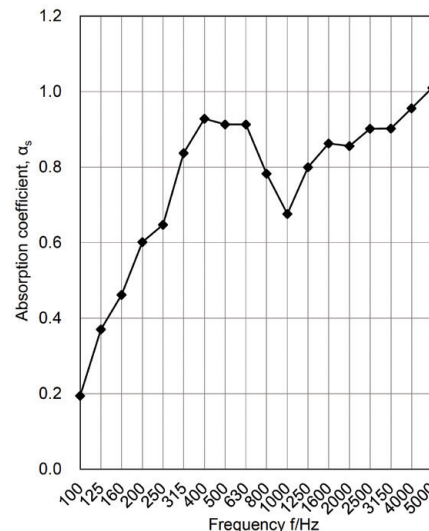


NO LIGHT SOURCE


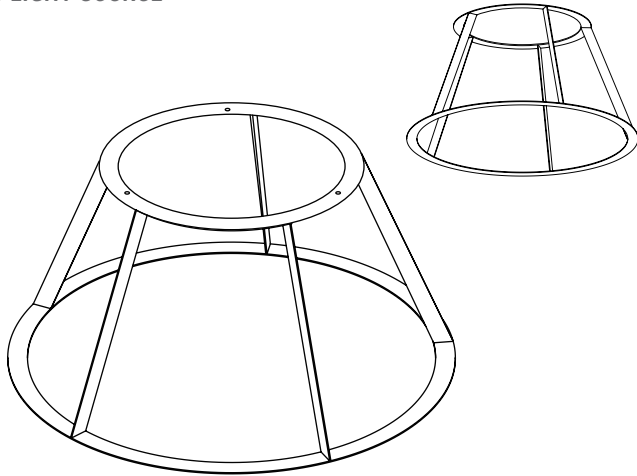


RETROFIT LIGHTING - fits any standard E26 Bulb. (Bulb not included.)

- 1 x A19/Medium (E26)/100W/120V Incandescent
- 1 x A19/Medium (E26)/120V LED

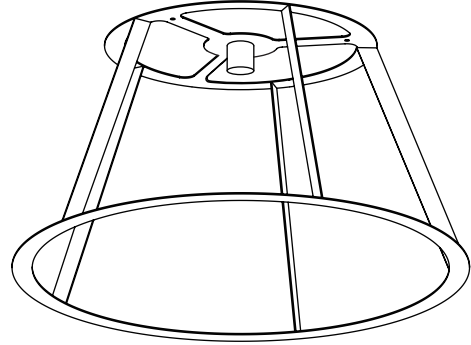

LED LIGHT SOURCE

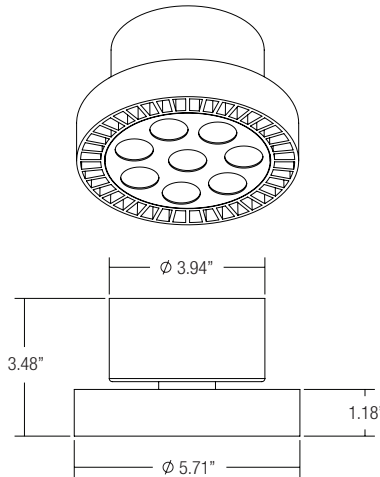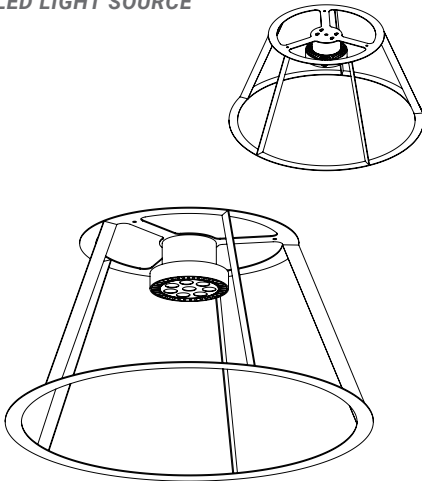

LUMENS	WATTS
5000	38
4500	34
4000	30
3500	26.5
3000	22.5
2500	19
1750	13.5

Based on 3000K, 90+ CRI.
Actual wattage may vary +/- 5%

SOFTSENSE MATERIAL COLOR CHART

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS


All panels ASTM E84-16 Fire Rated

STANDARD PRINTS

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale

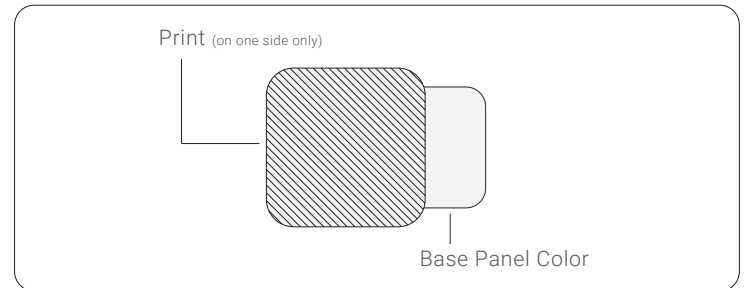

**Declare.
Label Pending**

quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A

STITCHING - COLOR CHART

BK Black	GV Gravel	ST Stone	WH White
RD Red	PK Pink	PU Purple	LI Lilac
BL Blue	OV Olive	MT Mint	LM Lemon
BG Beige	CL Clay	LT Latte	BW BROWN