


ST801



ST802

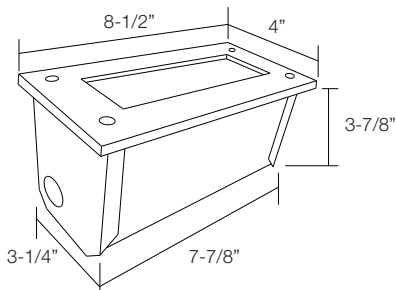

APPLICATION:

For concrete use only

BODY:

Galvanized steel
Supplied standard with two 3/4" knockouts located on sides

FACE PLATE:

High-grade die-cast aluminum

GASKET:

Single-piece molded silicon for wet location

LENS:

Frosted tempered glass
Bronze thermoset powder coat

EXTERNAL LOUVER:

Anodized 45° cut-off louver

REFLECTOR:

High-performance aluminum reflector assembly for superb light output

INSTALLATION:

Two 1/2" NPS wiring holes
Feed-through listed

BALLAST:

Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise or flicker

LISTING:

UL/C-UL for wet location



HOUSING AND FACE PLATE MUST BE ORDERED SEPARATELY.

Ordering Guide > Example: ST8BX-40-120-ST801-WH

ST8BX-40-120		
HOUSING TYPE/WATTAGE	FACE PLATE	FINISH
INCANDESCENT	ST801	WH - White
ST8BX-40-120V - 40W A19	ST802	BK - Black
CFL		BZ - Bronze
ST8BX-7-120V - 7W CFL2 PINS		AL - Satin Aluminum
ST8BX-9-120V - 9W CFL2 PINS		
ST8BX-13-120V - 13W CFL2 PINS		

***MUST BE USED WITH REMOTE TRANSFORMER**