


ONE LED MODULE FOR MULTIPLE TRIM OPTIONS



INSTALLATION

DIMENSIONS

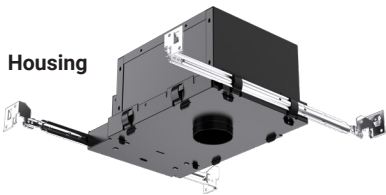


Housing



LED Module



Trim Option

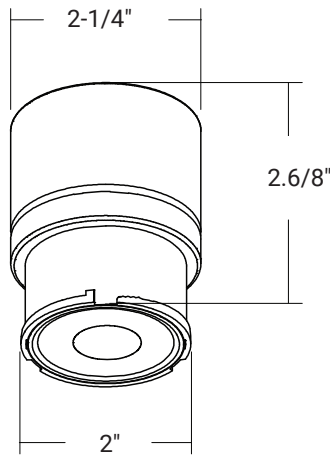

**EASY 5 COLORS SELECTOR**  
2700K • 3000K • 3500K • 4000K • 5000K

3 Field Changeable Distributions (included)



60°



36°



24°


NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
800	825	10W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

VERSA is a modular, quality lighting system created to make design flexibility and exceptional performance accessible. The VERSA VM2 is a versatile LED downlight module compatible with all VERSA 2", 3", 4" and 6" twist-on trims and includes snap-in, field-changeable optics with 24°, 36°, and 60° distributions for precise light control and minimal glare. A high CRI accounts for vibrant, true-to-life illumination of colors, and five CCT options from 2700K to 5000K allow for custom ambiance across different applications. Available with a variety of round and square trim options for a versatile look, and ideal for delivering tailored lighting solutions to high-end retail, hospitality, and residential settings. Dimmable, available only in 120 V and features an IC-rated housing for recessed mounting.

LUMENS	800L
CCT	27K/30K/35K/40K/50K
	90+ Standard
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Recessed
DIMMING	DIMTR (Triac Dimming)
DISTRIBUTION	24°, 36°, and 60° (Field-Changeable Optics)
FINISH	BK (Black)
TRIM OPTIONS	Compatible with 2", 3", 4" & 6" trim and trimless trim options.
TRIM COLORS (Reflector-Flanged)	WH- (White-White), BK-BK (Black-Black), BZ-BZ (Bronze-Bronze), BK-WH (Black-White) CL-WH (Chrome-White), HZ-WH (Satin Haze-White)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In accordance with IES LM79-08, LM80 and TM-30, TM-21

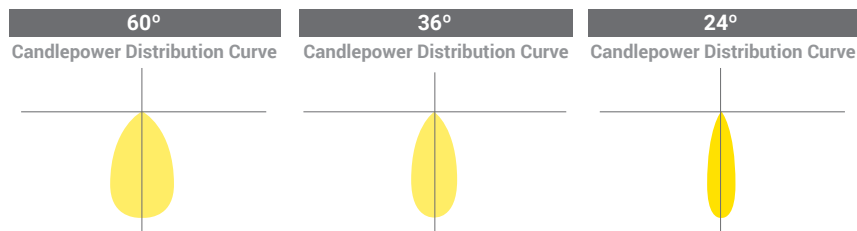

Reference IES files for additional distribution curve information.



**OPTICS**

Features a 90+ Color Rendering Index (CRI) to guarantee vivid, bright color illumination, and tightly binned LEDs for color consistency. Field-changeable optics for 24°, 36°, and 60° medium distribution angles are included with the module. An internal reflector reduces shadow and evens out light distributions.

**CONSTRUCTION**

Featuring an integrated driver and premium light engine with a quickconnect design. A die-cast aluminum body includes heat fins for efficient heat dissipation, while Chip on Board Technology, helps keep construction compact and light weight. IC-rated aluminum housing for recessed mounting.

**MOUNTING & INSTALLATION**

Designed for tool-less trim installation using a twist-lock mechanism. VERSA LED modules themselves can be easily connected and disconnected from the housing for ease of installation, maintenance, and replacement.

**OPTIONS**

Available to order with various round and square trim options, including flanged square, pinhole, pinhole square, flanged round, adjustable, etc. VERSA VM2 is compatible with 2", 3", 4", and 6" trim options. Please see order sheet for details.

**DRIVER & ELECTRICAL**

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

Boasts a quality lifespan of 50,000 hours L70 based on LM80 standardized test results.

**DIMMING**

DIMTR - Triac & Electronic low voltage dimming to 5%. Available in 120V only.

**LISTINGS**

cUL Listed for Damp Locations.  
Can be used in Wet Locations with appropriate Wet Location trims.  
Energy Star Certified. Title 24 JA8 Compliant.  
IC-Rated, air-tight ready, and may be in direct contact with insulation.

**WARRANTY**

5-year warranty for parts and components (labor not included).

Example: **VM2-800L-DIMTR-120-MD/4KT-27K/30K/35K/40K/50K-90-BK**

<b>VM2</b>						
<b>SERIES</b>	<b>LUMENS</b>	<b>DIMMING</b>	<b>VOLTAGE</b>	<b>DISTRIBUTION</b>	<b>CCT</b>	<b>FINISH</b>
VM2 Module	800L	DIMTR - Triac Dimming	120V	MD/4KT 3 DISTRIBUTION KIT 24/36/60 DEGREES (Field-Changeable optics)	27K/30K/35K/40K/50K	BK - Black

**TRIM OPTIONS**

<b>2" TRIM OPTIONS</b>	<b>3" TRIM OPTIONS</b>	<b>4" TRIM OPTIONS</b>	<b>6" TRIM OPTIONS</b>	<b>TRIM COLORS</b>
<b>V2S-F-1202</b> - Flanged Square <b>V2S-F-1297</b> - Pinhole Adjustable Square <b>V2S-F-1285</b> - Flanged Adjustable Gimbal <b>V2R-F-1202</b> - Flanged Round Trim <b>V2R-F-1214</b> - Pinhole Adjustable <b>V2R-F-1215</b> - Flanged Adjustable Round	<b>V3S-F-1307</b> - Flanged Wall Wash Square <b>V3S-F-1397</b> - Flanged Adjustable Gimbal <b>V3S-F-1381</b> - Flanged Square <b>V3R-F-1302</b> - Flanged Round <b>V3R-F-1363</b> - Flanged Adjustable Gimbal <b>V3R-F-1307</b> - Flanged Wall Wash Round	<b>V4S-F-1481</b> - Flanged Square <b>V4S-F-1497</b> - Flanged Adjustable Square <b>V4R-F-1402</b> - Flanged Adjustable Gimbal <b>V4R-F-1463</b> - Flanged Adjustable Round	<b>V6R-F-1663</b> - Flanged Adjustable Gimbal	<b>*WH</b> - White Pinhole Option <b>W-WH</b> - White Reflector-White Flange (Standard) <b>BK-BK</b> - Black Reflector-Black Flange <b>BK-WH</b> - Black Reflector-White Flange <b>BZ-BZ</b> - Bronze Reflector-Bronze Flange <b>CL-WH</b> - Chrome Reflector-White Flange <b>SH-WH</b> - Satin Haze Reflector-White Flange

**COMPATIBLE HOUSINGS**

<b>2" COMPATIBLE HOUSING</b>	<b>3" COMPATIBLE HOUSING</b>	<b>4" COMPATIBLE HOUSING</b>	<b>6" COMPATIBLE HOUSING</b>
<b>A-V2R-F-LED-IC</b> - IC New Construction Housing	<b>A-V3R-F-LED-IC</b> - IC New Construction Housing	<b>A-V4R-F-LED-IC</b> - IC New Construction Housing	<b>LD6IC-AT</b> - IC New Construction Housing


**2" TRIM OPTIONS**




**V2R-F-1202**  
Flanged Round




**V2R-F-1214**  
Pinhole Adjustable Round



**V2R-F-1215**  
Flanged Adjustable Round



**V2S-F-1202**  
Flanged Square




**V2S-F-1297**  
Adjustable Pinhole  
(Square Aperture)



**V2S-F-1285**  
Adjustable Square  
(Round Aperture)

**2" HOUSING OPTIONS**

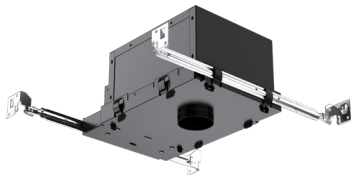

**A-V2R-F-LED-IC**  
New Construction

**3" TRIM OPTIONS**



**V3R-F-1302**  
Flanged Round



**V3S-F-1307**  
Wall Wash Round



**V3R-F-1363**  
Flanged Adjustable Round



**V3R-F-1397**  
Adjustable Square Gimbal




**V3R-F-1381**  
Flanged Square  
(Round Aperture)



**V3S-F-1307**  
Wall Wash Square  
(Square Aperture)

**3" HOUSING OPTIONS**

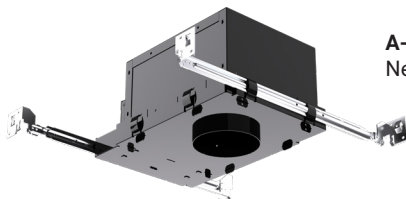

**A-V3R-F-LED-IC**  
New Construction


**4" TRIM OPTIONS**



**V4R-F-1402**  
Flanged Round



**V4R-F-1463**  
Adjustable Round




**V4S-F-1481**  
Adjustable Square  
(Round Aperture)



**V4S-F-1497**  
Adjustable Square  
(Round Aperture)

**4" HOUSING OPTIONS**

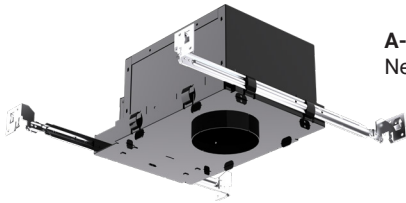

**A-V4R-F-LED-IC**  
New Construction

**6" TRIM OPTIONS**



**V6R-F-1663-W-W**  
Flanged Adjustable  
Round

**6" HOUSING OPTIONS**



**LD6IC-AT**  
IC New Construction