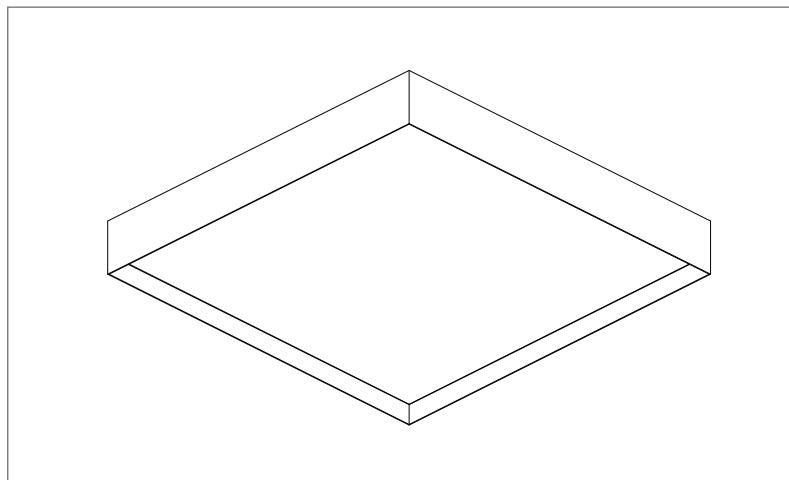



INSTALLATION INSTRUCTIONS**AP-SOLARIS-LED****Safety & Warnings**

1. Carefully read all instructions before proceeding.
2. Follow all national and local electrical codes when installing.
3. This product should be installed and serviced by a qualified, licensed electrician.
4. Use only with a compatible Class 2 LED driver. This product has not been tested with LED drivers that do not meet Class 2 voltage and energy limitations.
5. Do not install in wet areas. Suitable for dry and damp locations only.
6. Ensure the power is turned off before installing or servicing the fixture.
7. To prevent fire and overheating, ensure all connections are secure.

**WARNING: ELECTRIC SHOCK HAZARD!**

Serious injury or death may occur. Before installation or servicing, turn off the power at the circuit breaker.

Standard Suspension Diagram

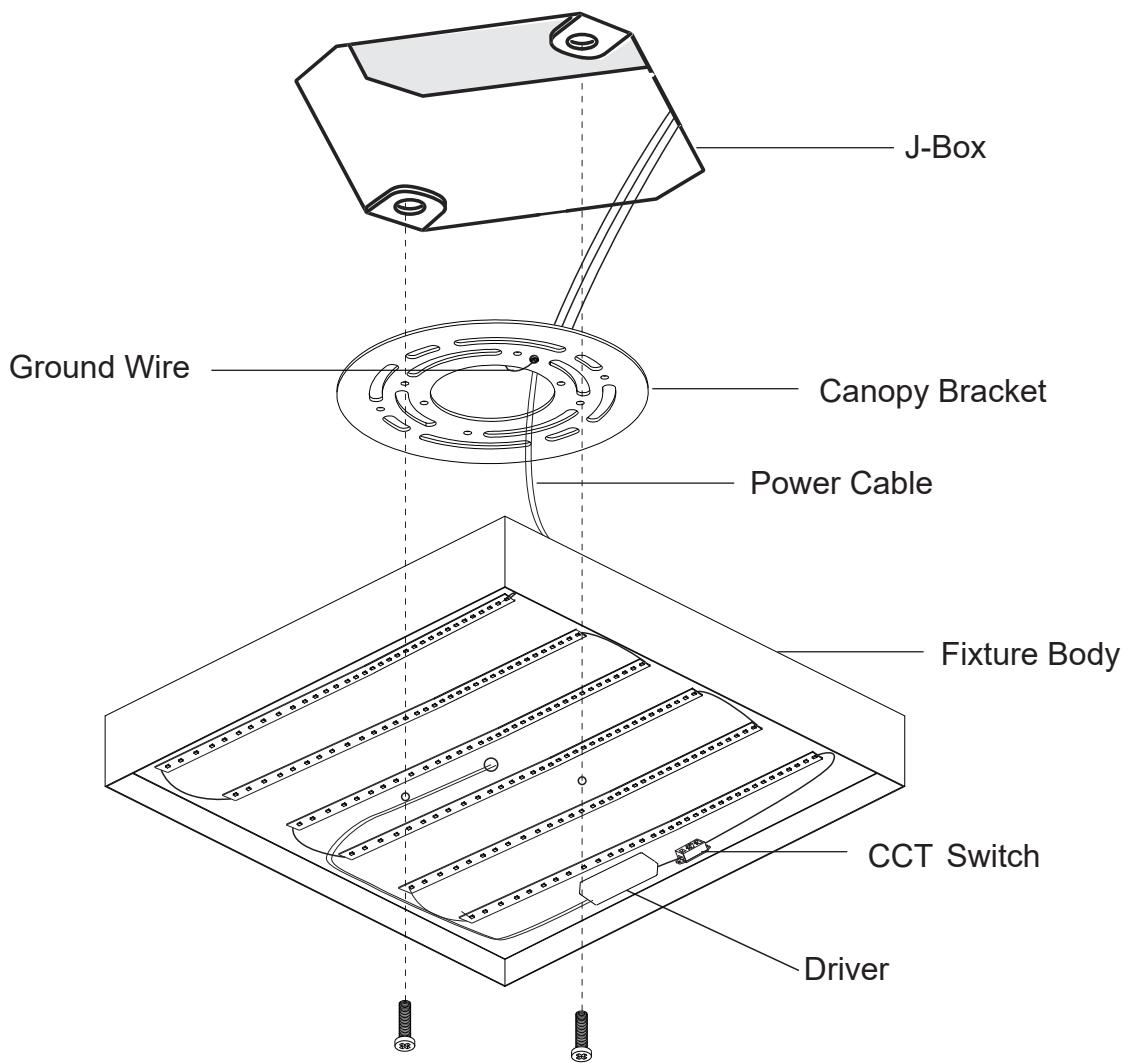

External Components

- 4" Square/Octagonal J-Box
- Wood Screws, #10, 1.5" long

Not Included.

Tools

- Drill
- #2 phillips bit
- Wire strippers
- 1/16" Hex Key (for Ceiling)
- 5/64" Hex Key (for Joining)

Not Included.

Specifications


Input Voltage / Frequency:
See product label

Rated Power:
See product drawing


Ambient Temperature:
-4° – 120°F (20° – 50°C)

Environment:
Dry and damp locations


INSTALLATION

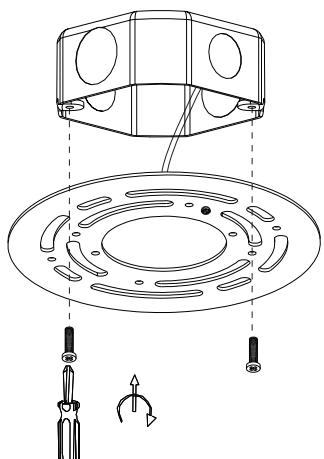


1 Position the board on the platform and mark the locations for the installation holes.

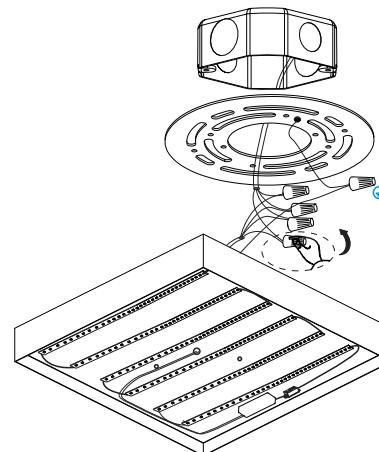


2 Connect the power wires and secure them firmly with a connection cap.

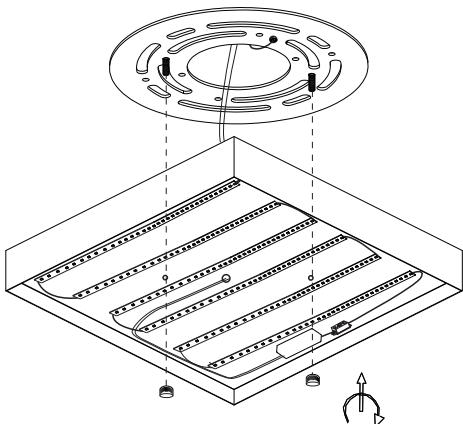


3 Secure the fixture body and the hanging plate using the flower brackets.

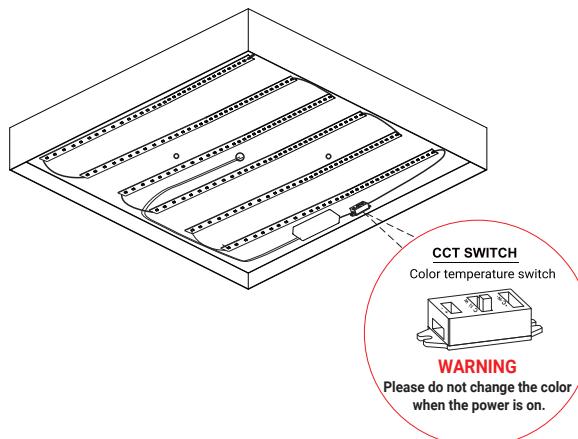

4 Choose the color temperature when the fixture is powered off.

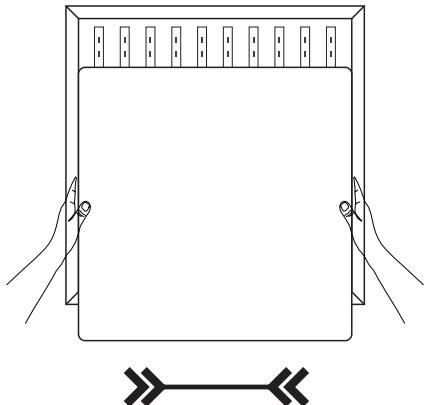

5 Carefully flex the diffuser and slide it into the fixture.

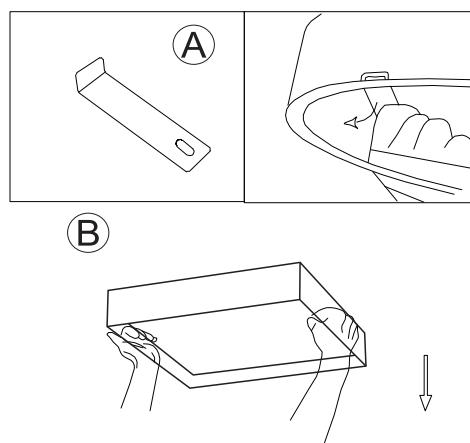

6 Use a removal clip to detach the diffuser when adjusting the color temperature.

WIRING DIAGRAM

0-10V Dimming/Triac Dimmable

