


ELA-300-JC

ELECTRONIC TRANSFORMER



LRT-303-AC

HEAVY DUTY 12V 300W AC TRANSFORMER W/ JUNCTION BOX

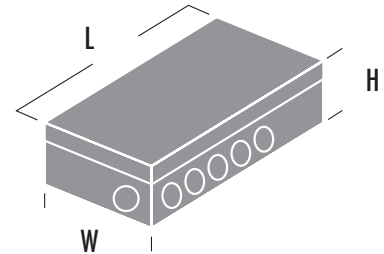

L: 7-5/8"

W: 3-1/2"

H: 1-5/8"

DESCRIPTION

This quiet 300W-12V electronic step-down transformer w/ junction box is designed to be used with low voltage lighting systems and is protected against overload, short circuit and over heat and has a 4 year guarantee. This transformer is offered with three 1/2" KO's and is designed for branch circuit and remote applications.

TECHNICAL SPECIFICATIONS

INPUT	120V 60Hz
OUTPUT AT MAX. LOAD	11.7V 40kHz
LOAD	50-300W
INPUT CURRENT AT	300W 2.5A
OUTPUT CURRENT AT	300W 25.5A
POWER FACTOR MIN.	0.985
MAXIMUM HARMONIC DISTORTION	9%
DIMMABLE	✓
ALUMINUM INNER CASING	✓
STEEL OUTER CASING	✓
WATER-PROOF POTTING UL94VO	✓
6 FUSED CIRCUITS	✓
UL AND C-UL LISTED	✓

SPECIFIED BY:

TYPE:

JOB NAME:

elite LIGHTING U.S.A.

Tel: 323-888-1973 • 877-375-5555 / Fax: 323-888-1977 • 877-375-3333
www.iuseelite.com • E-mail: sales@iuseelite.com