


ELX-711

Chicago Approved Steel LED Exit Signs

| | |
|------------------------|--------------|
| Catalog Number: | |
| Project Name: | |
| Note: | Type: |

Architectural Exit Sign

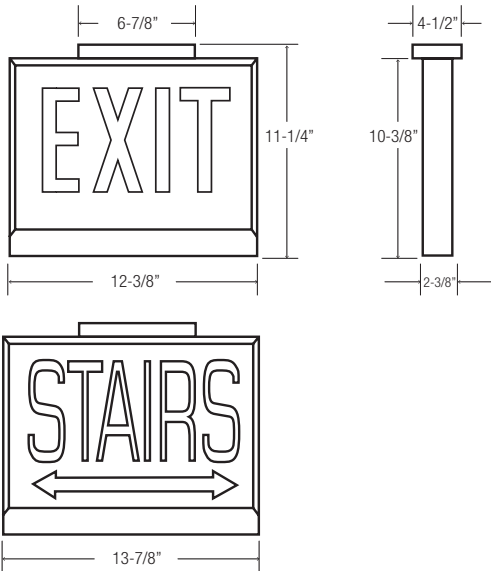

ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- Single or double face configurations.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCad battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on backplate for wall mount.

HOUSING

- 20-gauge steel housing.
- Neutral white finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.



ELX-711 - ITEM SELECTOR: (Please check the boxes below for the option desired)

| LETTER COLOR | HOUSING COLOR | NO. OF FACE | BATTERY | EXIT (SIGNAGE) | STAIRS (SIGNAGE) |
|----------------------------------|--|--|--|--|--|
| <input type="checkbox"/> R - Red | <input type="checkbox"/> W - White <input type="checkbox"/> B - Black | <input type="checkbox"/> 1 - Face <input type="checkbox"/> 2 - Face | <input type="checkbox"/> AC - AC only <input type="checkbox"/> EM - Emergency Back-up | <input type="checkbox"/> ENA - Exit No Arrow | <input type="checkbox"/> SNA - Stairs No Arrow |
| | | | | <input type="checkbox"/> EDA - Exit Double Arrow | <input type="checkbox"/> SDA - Stairs Double Arrow |
| | | | | <input type="checkbox"/> ERA ¹ - Exit Right Arrow | <input type="checkbox"/> SRA ¹ - Stairs Right Arrow |
| | | | | <input type="checkbox"/> ELA ¹ - Exit Left Arrow | <input type="checkbox"/> SLA ¹ - Stairs Left Arrow |
| | | | | <input type="checkbox"/> ELRA ² - Exit Left/Right Arrow | <input type="checkbox"/> SLRA ² - Stairs Left/Right Arrow |

Notes:

1. Available in single face configuration only • 2. Available in double face configuration only

SPECIFIED:

ELX-711 - _____ - _____ - _____ - _____ - _____
 LETTER COLOR HOUSING COLOR NO. OF FACE BATTERY OPTION DIRECTIONAL ARROWS



Submittal form is available @ www.maxilume.com
 Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.