

# ELX-LED-731

LED Exit/Emergency Light Combination w/ Emergency Battery Back-up

NEW



## FEATURES

- Unique, new design combines an energy-efficient LED EXIT sign with an LED emergency light into one low-profile unit
- EZ snap-out chevron directional indicators

## BODY

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish.

## FACE

- 6" high text with color diffusion
- Knockout directional chevrons

## MOUNTING

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

## ELECTRICAL

- Universal 120V or 277V dual Input

## OPERATION

- **Emergency Battery Back-Up** provides a minimum of 90 minutes illumination when AC power is lost.

## BATTERY

- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Long-life, maintenance-free, rechargeable Ni-cad battery
- Internal solid-state transfer switch automatically connects the internal battery to LED Board/light pipe for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


## LISTED

- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

## ILLUMINATION

- Ultra-bright, energy efficient white LED emergency lighting
- High-performance smooth thermoplastic reflector and polycarbonate "light pipe" lens for optimal light distribution and resistance to discoloration.
- Adjustable light pipe allows for optimal use of light output
- Long-lasting, energy efficient Red or Green LED exit sign

- Remote Capable standard

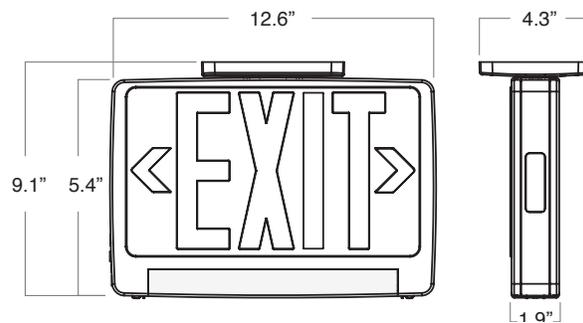

ITEM SELECTOR: (Please check the boxes below for the option desired)

| CATALOG#    | LETTER COLOR                       | HOUSING COLOR                      | NO. OF FACES                           | OPTION                   |
|-------------|------------------------------------|------------------------------------|--|--------------------------|
| ELX-LED-731 | <input type="checkbox"/> G - Green | <input type="checkbox"/> W - White | <input type="checkbox"/> 1 - (1) Face  | SDT<br>- Self-diagnostic |
|             | <input type="checkbox"/> R - Red   | <input type="checkbox"/> B - Black | <input type="checkbox"/> 2 - (2) Faces |                          |



SPECIFIED:

**ELX-LED-731**

LETTER COLOR

HOUSING COLOR

NO. OF FACE



EXIT SIGNS AND EMERGENCY LIGHTING