




Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

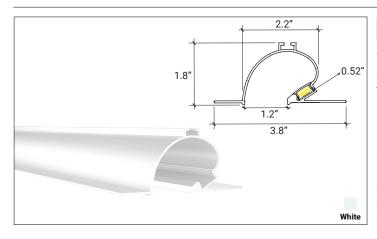


Lumi-PRO Extrusion SPECIALTY/COVE TUNNEL INDIRECT LIGHT

The Lumi-PRO Cove Tunnel Indirect LED Light Profile is the ideal solution for creating captivating circular ceiling cove lighting effects with soft, indirect light directed upwards towards the ceiling. Engineered to deliver seamless wall-washing effects, it produces a uniform, ambient glow that enhances the space with a soft, circular light distribution.


Equipped with integrated diffuser lenses, the profile ensures consistent light diffusion for both accent and general illumination, making it versatile for a wide range of applications.

Specifically designed for compatibility with our LB Series LED Strip Lights, these extrusions offer customizable and adaptable lighting solutions for recessed architectural features in residential, commercial, and hospitality spaces.

Example: LP-LGC-CTI-SPC-2-8-WH-FTD

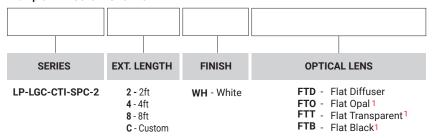

1.MOQ (minimum order quantity) required for these options, please consult factory.

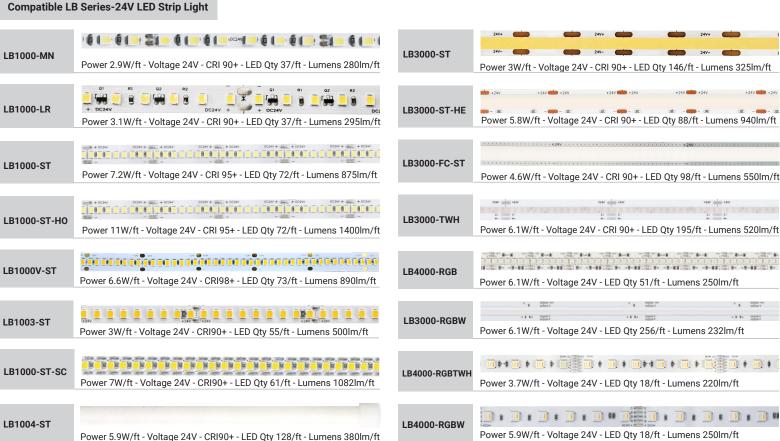









Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

DIMENSIONS

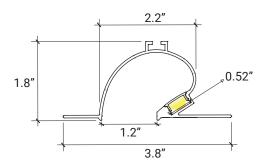

MOUNTING




Mounting the profile directly using screws without the need for clips

OPTICAL LENSES











FTD - Flat Diffuser INCLUDED

FTB - Flat Black - OPTIONAL

2 End Caps With Holes INCLUDED

2 End Caps Without Holes INCLUDED

It Can be ordered in 3 different ways.

1. Everything will be shipped separately

RI

 Channel, cover, accessories and tape light will be cut and shipped to your desired length.





Accessories if ordered.



2. Pre-assembled and shipped separately as two units

DΛ

- Channel, cover, accessories and tape light will be cut and shipped to your desired length.
- Cover, end caps and clips will be assembled to the channel.
- Wiring accessories will be attached to the tape light.





Wiring accessories attached to the tape light.

3. Fully assembled and shipped as a single unit

FΛ

- Channel, cover, accessories and tape light will be cut and shipped to your desired length.
- Wiring accessories will be attached to the tape light.
- Tape light will be installed into the channel and ready to use.





Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information.

COMPATIBLE TAPE LIGHT Ordering Guide

Power feed, jumpers and connectors compatible with this channel

	LB1000-MN	LB1000-LR	LB1000-ST	LB1000-ST-HO	LB1000V-ST	LB1003-ST	LB1000-ST-SC	LB1004-ST
Soldered Lead (SL)	✓	✓	√	✓	✓	√	√	✓
Soldered Jumper (JPSL)	√	✓	✓	√	√	√	√	√
Power Connector (TW)	Х	X	X	X	X	X	X	X
Tape Connector (TT)	Х	X	X	X	X	X	X	X
Tape Jumper (JP)	Х	X	X	X	X	X	X	X
Closed End (CE)	✓	✓	√	✓	✓	√	✓	√
DC Connector Male- (DCM)	√	✓	√	√	✓	√	✓	√
DC Connector Female-(DCF)	√	√	√	✓	✓	√	✓	√

Power feed, jumpers and connectors compatible with this channel

	LB3000-ST	LB3000-ST-HE	LB3000-FC-ST	LB3000-TWH	LB4000-RGB	LB3000-RGBW	LB4000-RGBTWH	LB4000-RGBW
Soldered Lead (SL)	✓	✓	✓	✓	√	✓	√	√
Soldered Jumper (JPSL)	√	✓	✓	✓	√	✓	√	√
Power Connector (TW)	√	✓	✓	✓	X	X	Х	X
Tape Connector (TT)	✓	√	√	√	X	X	X	X
Tape Jumper (JP)	✓	√	√	√	X	Х	X	X
Closed End (CE)	✓	√	√	√	√	√	✓	✓
DC Connector Male- (DCM)	√	✓	✓	✓	✓	✓	√	√
DC Connector Female-(DCF)	✓	√	√	√	√	√	√	√

SL= Soldered Lead JPSL= Soldered Jumper DCM=DC Connector Male soldered DCF=DC Connector Female soldered TW=Tape to Wire Power Feed TT=Tape to Tape Connector JP=Jumper Wire for Connectors CE=Closed end no connector




Not compatible with this channel.

NOTE: The endcap hole should be enlarged to allow wiring to pass through, or the channel may be used without endcaps.









Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information.

COMPATIBLE TAPE LIGHT Ordering Guide

Power feed, jumpers and connectors compatible with this channel

	LB1000-WDM				
Soldered Lead (SL)	✓				
Soldered Jumper (JPSL)	✓				
Power Connector (TW)	X				
Tape Connector (TT)	X				
Tape Jumper (JP)	X				
Closed End (CE)	✓				
DC Connector Male- (DCM)	✓				
DC Connector Female-(DCF)	√				

SL= Soldered Lead JPSL= Soldered Jumper DCM=DC Connector Male soldered DCF=DC Connector Female soldered
TW=Tape to Wire Power Feed TT=Tape to Tape Connector JP=Jumper Wire for Connectors CE=Closed end no connector



Not compatible with this channel.

NOTE: The endcap hole should be enlarged to allow wiring to pass through, or the channel may be used without endcaps.








LP-LGC-CTI-SPC-2

Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information.




| 280lm/ft - 2.9W/ft | 1ndoor Strip Light | Width / 0.16"/4mm

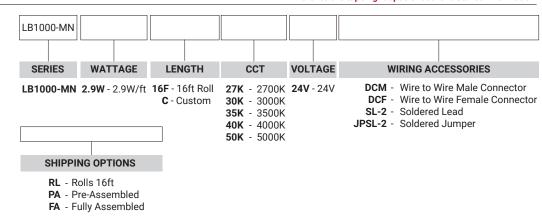





Series-LB1000-LR | 295lm/ft - 3.1W/ft | Indoor Strip Light | Width / 0.39" /10mm | 37 LEDs/FT

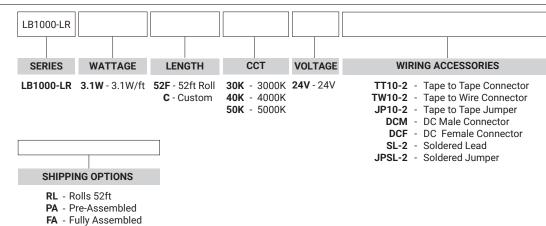



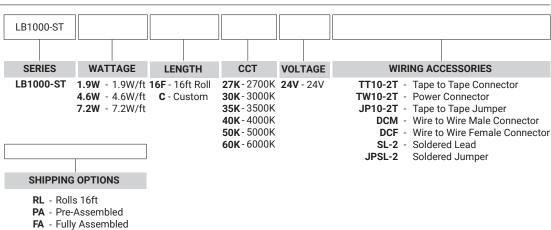



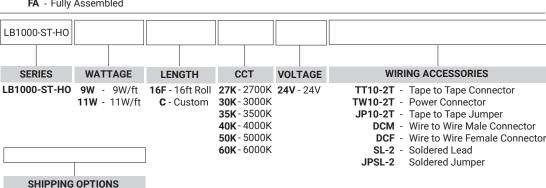

RL - Rolls 16ft
PA - Pre-Assembled
FA - Fully Assembled









LP-LGC-CTI-SPC-2

Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information.



Series-LB1000V-ST Indoor Strip Light Width / 0.39" / 10mm 73 LEDs/FT

890lm/ft-6.6W/ft

LB1000V-ST **SERIES** WATTAGE LENGTH WIRING ACCESSORIES CCT **VOLTAGE LB1000V-ST 6.6W** - 6.6W/ft **16F** - 16ft Roll 27K - 2700K 24V - 24V TW10-2T - Tape to Wire Connector C - Custom 30K - 3000K JP10-2T - Tape to Tape Jumper 35K - 3500K DCM - DC Male Connector 40K - 4000K DCF - DC Female Connector **50K** - 5000K SL-2 - Soldered Lead JPSL-2 - Soldered Jumper **SHIPPING OPTIONS** RL - Rolls 16ft PA - Pre-Assembled FA - Fully Assembled



Series-LB1003-ST Indoor Strip Light Width / 0.3"/8mm 55 LEDs/FT


Single Cut


LED Strip Light





Series-LB1000-ST-SC | 1082lm/ft-7W/ft Indoor Strip Light Width / 0.3" / 8mm 61 LEDs/FT

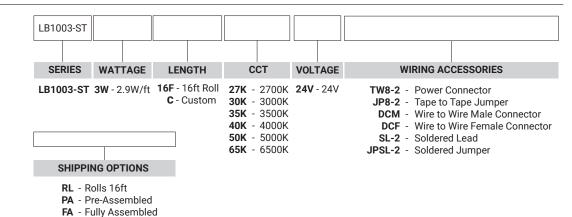



FA - Fully Assembled

13F - 13ft Roll 27K - 2700K 24V - 24V C - Custom **30K** - 3000K 35K - 3500K 40K - 4000K **50K** - 5000K 65K - 6500K

CCT

VOLTAGE


LENGTH

WIRING ACCESSORIES TW8-2 - Tape to Wire Connector JP8-2 - Tape to Tape Jumper DCM - DC Male Connector DCF - DC Female Connector SL-2 - Soldered Lead JPSL-2 - Soldered Jumper



Series-I R1004-ST Indoor Strip Light Width / 0.39"/ 10mm 128 LEDs/FT


380lm/ft - 6W/ft

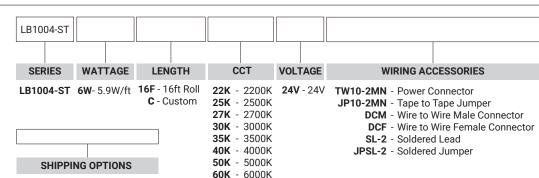

RL - Rolls 16ft PA - Pre-Assembled FA - Fully Assembled








Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information




Indoor Strip Light Width / 0.3"/8mm 146 LEDs/FT

Series-LB3000-ST | 325lm/ft - 3W/ft

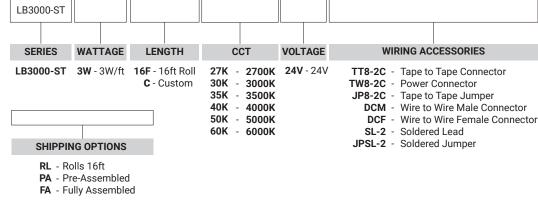




Series-LB3000-ST-HE |940lm/ft-5.8W/ft Indoor Strip Light Width / 0.39" / 10mm 88 LEDs/FT

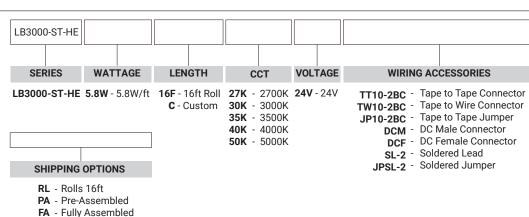



Series-LB3000-FC-ST | 550lm/ft-4.6W/ft Indoor Strip Light Width / 0.39" / 10mm 98 LEDs/FT

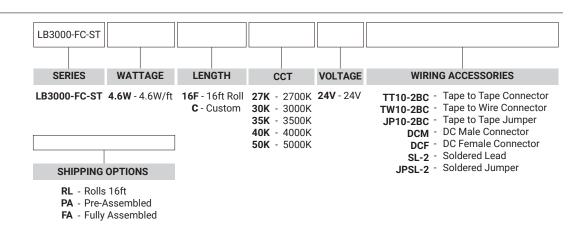

TECHNOLOGY

6.1W - 6.1W/ft 16F - 16ft Roll TWH-65K-27K - TWH/6500K-2700K 24V - 24V



Series-LB3000-TWH | 520lm/ft - 6.1W/ft Indoor Strip Light Width / 0.39"/10mm

LB3000

SERIES

LB3000

SHIPPING OPTIONS RL - Rolls 16ft

WATTAGE

LENGTH

C - Custom

PA - Pre-Assembled FA - Fully Assembled



195 LEDs/FT

WIRING ACCESSORIES

TW10-3C - Power Connector

JP10-3C Tape to Tape Jumper SL-3 - Soldered Lead JPSL-3 - Soldered Jumper

VOLTAGE






LP-LGC-CTI-SPC-2

Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT

Refer to the tape light spec sheet for detailed information.





Series-LB4000-RGB | 250lm/ft - 6.1W/ft Indoor Strip Light Width / 0.39" / 10mm 51 LEDs/FT

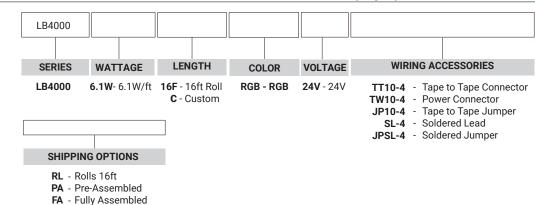



Series-LB3000-RGBW | 255lm/ft - 6.1W/ft Indoor Strip Light Width / 0.47"/12mm 256 LEDs/FT

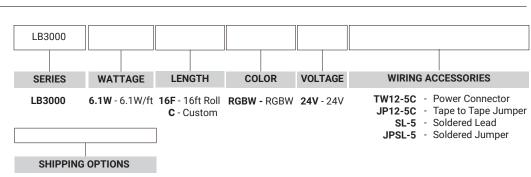






Series-LB4000-RGBTWH **Indoor Strip Light** Width / 0.47"/12mm 18 LEDs/FT


SERIES WATTAGE LENGTH LB4000 3.7W - 3.7W/ft 16F - 16ft Roll RGB/TWH- RGB/TWH 24V - 24V C - Custom SHIPPING OPTIONS

LB4000





Series-LB4000-RGBW 250lm/ft - 5.9W/ft Indoor Strip Light Width /0.47"/12mm 18 LEDs/FT

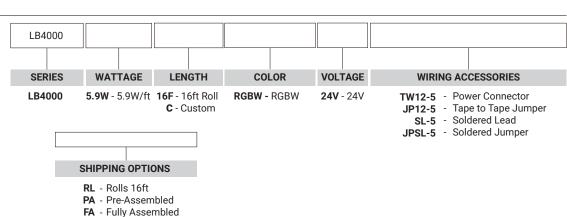

COLOR

VOLTAGE

WIRING ACCESSORIES TW12-6 - Power Connector

JP12-6 - Tape to Tape Jumper SL-6 - Soldered Lead JPSL-6 - Soldered Jumper







LP-LGC-CTI-SPC-2

Lumi-PRO Extrusion/COVE TUNNEL INDIRECT LIGHT



Series-LB1000-WDM | 515lm/ft - 4.4W/ft | Indoor Tape Light | Width / 0.47"/12mm | 51 LEDs/FT

