

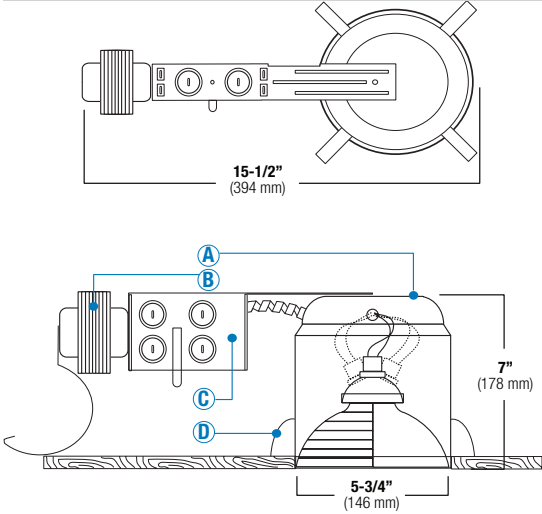
BL5R

5" Low Voltage Non-IC Remodel Housing

LAMP WATTAGE: (1) MAXIMUM 12V 75W MR16



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION



BL5R - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	TRIM TYPE	BAFFLE	REFLECTOR	TRIM RING	MR 16 LENS FILTER
<input type="checkbox"/> 20W	<input type="checkbox"/> (M) Magnetic	<input type="checkbox"/> 120	<input type="checkbox"/> B1503	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> BP8MR16-BL (Blue)
<input type="checkbox"/> 35W	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> 277	<input type="checkbox"/> B1506	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> BP8MR16-GR (Green)
<input type="checkbox"/> 50W	<input type="checkbox"/> (TOR) Toroidal*		<input type="checkbox"/> B1508	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> BP8MR16-PI (Pink)
<input type="checkbox"/> 75W			<input type="checkbox"/> B1512	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> BP8MR16-PU (Purple)
		OPTION	<input type="checkbox"/> B1520	<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> BP8MR16-DL (Day Light)
		<input type="checkbox"/> AT (Air-Shut)	<input type="checkbox"/> B1542		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> BP8MR16-YE (Yellow)
			<input type="checkbox"/> B1524		<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> BP8MR16-AM (Amber)
			<input type="checkbox"/> B1525		<input type="checkbox"/> SHZ		<input type="checkbox"/> BP8MR16-OR (Orange)
			<input type="checkbox"/> B1504				<input type="checkbox"/> BP8MR16-RE (Red)
			<input type="checkbox"/> B1514				
			<input type="checkbox"/> B1551				

*TOR -Toroidal available only in BL5R-50W-TOR-120V

Specifications:

BL5R WATT BALLAST VOLTAGE OPTION TRIM TYPE BAFFLE REFLECTOR TRIM/RING FILTER (1) FILTER (2)

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

Catalog Number:

Project Name:

Type:

Note:



DESCRIPTION

Low voltage, thermally protected remodel housing. For remodel application where insulation can be kept 3" from housing. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-1/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Accommodates up to 50W MR16 lamps. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

SPECIFICATION

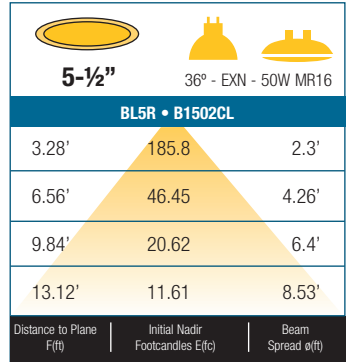
A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Accommodate lamps up to 75W depending on trim used.

B. TRANSFORMER - Enhanced in heat dissipating cover, to provide noise free operation. Attached to junction box cover so it may be serviced from below the ceiling. Thermally protected.

- **M**-Class H dimming magnetic transformer.
- **E**-Class II dimming electronic transformer (LighTech part #LET 75 BF)
- **TOR**-Class H dimming toroidal transformer, providing 35% more lumens than traditional transformers. Constructed of M3 grade silicone steel. (Must use dimmers rated for electromagnetic transformer)

C. JUNCTION BOX - listed for Feed-through wiring with eight 1/2" KOs and four Romex knockouts with strain relief.

D. INSTALLATION - Four remodel clips are easily retractable for fixture removal if necessary.



BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Integral low voltage magnetic transformer improves lamp life and lighting quality.
- Thermally Protected Non-IC housing.
- Designed for accent and task lighting applications.
- Wire through junction box.
- Dependable, favorable design and effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.
- Unit slips through 5-1/2" ceiling opening.
- Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".

OPTIONS

1. AIR-SHUT

- **Gasket to prevent air flow from heated or air conditioned spaces.**
- **Meets all national air flow requirements.**

Sample of Catalog Number: BL5R-20W-E-B1503WH-BP8MR16-BL



Submission form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

REV: ELITE LIGHTING-SPEC-05-24-2011

5" Low Voltage Trims

(LAMP WATTAGE: 75W 12V MR16)


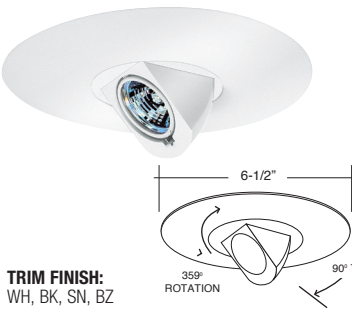

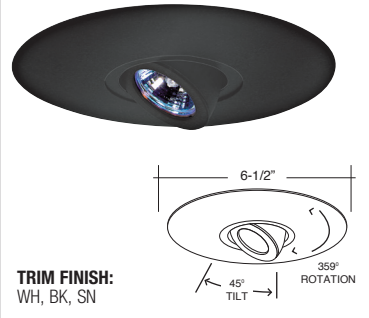


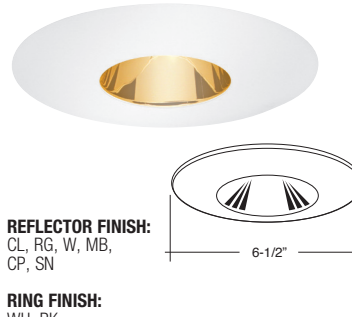
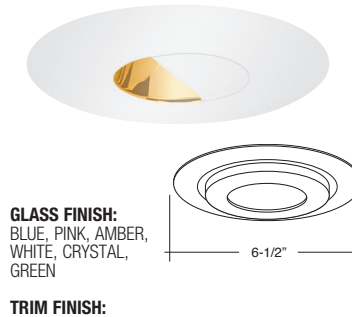


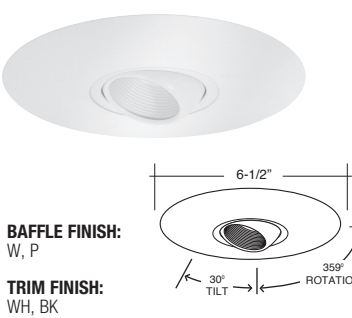
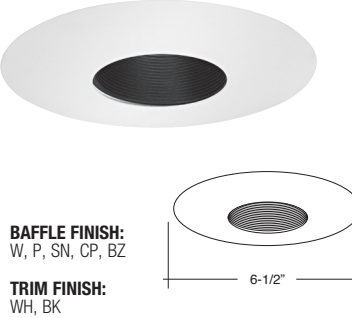
Catalog Number:

Project Name:

Type:

Note:



<p>B1503WH SLOT APERTURE (30° TILT)</p>  <p>TRIM FINISH: WH</p>	<p>B1506WH SURFACE FULLY ADJUSTABLE</p>  <p>TRIM FINISH: WH, BK, SN, BZ</p>	<p>B1508WH ADJUSTABLE SPOT</p>  <p>TRIM FINISH: WH, BK, SN</p>	<p>B1512BK SURFACE ADJUSTABLE</p>  <p>TRIM FINISH: WH, BK, SN</p>
<p>B1520W-WH SEMI FROSTED SHOWER TRIM (30° TILT)</p>  <p>REFLECTOR FINISH: CL, RG, W, MB, CP, SN, BZ, SHZ</p> <p>RING FINISH: WH, BK</p> 	<p>B1542RG-WH REFLECTOR</p>  <p>REFLECTOR FINISH: CL, RG, W, MB, CP, SN</p> <p>RING FINISH: WH, BK</p>	<p>B1524WH-PEACH METROPOLITAN GLASS</p>  <p>GLASS FINISH: BLUE, PINK, AMBER, WHITE, CRYSTAL, GREEN</p> <p>TRIM FINISH: WH</p>	<p>B1525WH-BLUE METROPOLITAN STEPPED GLASS</p>  <p>GLASS FINISH: BLUE, PINK, AMBER, WHITE, CRYSTAL, GREEN</p> <p>TRIM FINISH: WH</p>
<p>B1514P-WH PINHOLE BAFFLE</p>  <p>BAFFLE FINISH: W, P</p> <p>TRIM FINISH: WH, BK</p>	<p>B1504W-WH ADJUSTABLE EYEBALL</p>  <p>BAFFLE FINISH: W, P</p> <p>TRIM FINISH: WH, BK</p>	<p>B1551P-WH STEPPED BAFFLE</p>  <p>BAFFLE FINISH: W, P, SN, CP, BZ</p> <p>TRIM FINISH: WH, BK</p>	

BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.