




MULTI-LUMEN
SELECTOR

EASY 3 COLORS
SELECTOR
3500K-4000K-5000K

1'X4' DIMENSIONS

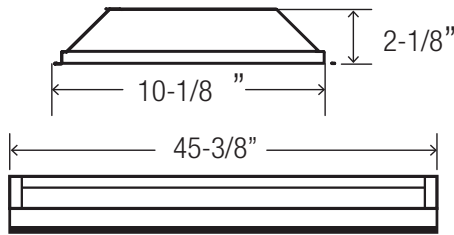

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
4000	4370	34W
3000	3333	25W
2000	2339	16W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OVHP-RTK is a DLC Premium-qualified architectural-grade troffer retrofit kit that makes it easy to upgrade fluorescent troffers to LED. One-piece construction allows the fixture to be accessed from the bottom without having to remove the lens. Easily adjust output and color temperature in the field with multi-lumen and multi-CCT selector switches. Brighter, volumetric illumination makes this troffer retrofit kit ideal for offices, hallways, conference rooms, warehouses, gymnasiums, retail, hospitality, commercial, and healthcare applications.

LUMENS	2000/3000/4000
CCT & DYNAMIC PLATFORMS	35K/40K/50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	1'x4', 2'x2', 2'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L 20W - Up to 2000L
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The center acrylic diffuser is secured tightly to the body with screws, so the lens will not detach from the fixture when undergoing cleaning, in multi-storied spaces, or in high-vibration areas. The center acrylic diffuser can be removed, allowing easy access to LED boards.

OPTICAL SYSTEM

LED light engines are attached directly to the housing and keep LED engines cool. An advanced thermal management system allows the light output of the LED engines to be maintained at 80% of initial lumens at 60,000 hours of operation. Frosted acrylic lens gathers light scattered by the LED chips and delivers highly efficient volumetric lighting, eliminating unwanted shadows and surface glare.

CONSTRUCTION

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. Housing is constructed of heavy-duty 20-gauge cold-rolled steel for maximum strength and long-life, post-painted with a 93% reflective white coat to protect against rusting, corrosion, and for safety of use when handling the fixture. All corners are rounded to remove sharp edges for safe handling.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MULTI-LUMEN, MULTI-CCT SELECTOR SWITCHES

Lumen and CCT selector switches are clearly visible and identifiable on the back of the fixture for easy adjustability. No need to remove the lens to access the two switches. One switch controls CCT and another switch operates lumens, allowing the contractor to easily mix and match intensity and color temperatures in the field.

MOUNTING

Compatible with surface mounting and for fixtures with recessed with recessed housings of 3-1/8" depth or greater.

Fast, Simple Installation

Can be installed into existing housings with 3-1/8" depth or greater.

1. Open the cover of the existing fixture. Remove all florescent tubes and internal components.
2. Remove the cover. Disconnect ballast.
3. Slide the 2 provided hanger bars into each side of the existing housing.
4. Slide in one end of the fixture onto a hanger bar. Secure with a self-tapping screw.
5. Secure aircraft cable to frame of the housing. Connect your wiring.
6. Flip fixture up and secure in place by pushing built-in tabs inward.

OPTIONS

Flange kits and surface mount kits are available as additional accessories. A factory-installed 10 or 20W 90-min. emergency battery is also available. Consult factory for details. Option for Made in America compliance.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

cULus
DLC Premium

Example: **14-OVHP-RTK-LED-2000L/3000L/4000L-DIM10-MVOLT-35K/40K/50K-85**

14	OVHP-RTK	LED							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS
14 - 1' X4'	OVHP-RTK - LED Retrofit Kit	LED	2000L/3000L/4000L	DIM10 - 0-10V Dimming	MVOLT	35K/40K/50K	85	0-EMG-LED-10W 0-EMG-LED-20W	FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse USA - Made in America Compliance

14-OVHP-RTK-LED-2000L-3000L-4000L-DIM10-MVOLT-35K-40K-50K-85(2000L)

TEST NO.: **EL10122077**

INPUT WATTS: **16.5**

LUMENS: **2339**


CRI: **85**

EFFICACY: **142**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	285.50	12.20	12.20
0-30	608.32	26.00	26.00
0-40	1002.32	42.80	42.80
0-60	1805.62	77.20	77.20
0-80	2270.93	97.10	97.10
0-90	2315.98	99.00	99.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1866	2024	2185
55	1766	2005	2178
65	1636	1933	1972
75	1399	1694	1622
85	949	1150	1015

Lumens Per Zone

Zone	Lumens
0-10	73.78
10-20	211.73
20-30	322.81
30-40	394.00
40-50	417.05
50-60	386.25
60-70	296.20
70-80	169.11
80-90	45.05

Candela Tabulation

0	
0.0	779.909
5.0	776.460
15.0	742.000
25.0	680.280
35.0	594.400
45.0	490.770
55.0	376.690
65.0	257.110
75.0	134.650
85.0	30.780
90.0	2.380

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%	
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	0%
0	119	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	99
1	108	103	99	95	105	101	97	93	93	97	93	90	93	90	87	89	87	85	82	82
2	98	90	83	77	96	88	81	76	76	84	79	74	81	76	72	78	74	71	68	68
3	89	79	70	64	87	77	69	63	63	74	67	62	71	65	61	68	64	59	57	57
4	82	70	61	54	79	68	60	53	53	65	58	52	63	57	52	61	55	51	49	49
5	75	62	53	46	73	61	52	46	46	59	51	45	56	50	45	54	49	44	42	42
6	69	56	47	40	67	55	46	40	40	53	45	39	51	44	39	49	43	39	36	36
7	64	50	42	35	62	50	41	35	35	48	40	35	46	40	34	45	39	34	32	32
8	60	46	37	31	58	45	37	31	31	44	36	31	42	36	31	41	35	31	29	29
9	56	42	34	28	54	41	34	28	28	40	33	28	39	32	28	38	32	27	26	26
10	52	39	31	26	51	38	31	25	25	37	30	25	36	30	25	35	29	25	23	23

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

14-OVHP-RTK-LED-2000L-3000L-4000L-DIM10-MVOLT-35K-40K-50K-85(3000L)

TEST NO.: **EL10122078**

INPUT WATTS: **25**

LUMENS: **3333**


CRI: **85**

EFFICACY: **133**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	404.15	12.10	12.10
0-30	861.05	25.80	25.80
0-40	1420.76	42.60	42.60
0-60	2567.56	77.00	77.00
0-80	3234.68	97.10	97.10
0-90	3299.23	99.00	99.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2646	2870	3098
55	2506	2840	3087
65	2351	2746	2798
75	2007	2437	2332
85	1296	1615	1410

Lumens Per Zone

Zone	Lumens
0-10	104.44
10-20	299.71
20-30	456.90
30-40	559.71
40-50	595.32
50-60	551.48
60-70	423.98
70-80	243.14
80-90	64.55

Candela Tabulation

0	
0.0	1103.654
5.0	1096.510
15.0	1051.060
25.0	962.910
35.0	842.070
45.0	695.810
55.0	534.550
65.0	369.520
75.0	193.200
85.0	42.030
90.0	3.340

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%	
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	0%
0	119	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	99
1	108	103	99	95	105	101	97	93	93	97	93	90	92	90	87	89	87	85	82	82
2	98	90	83	77	96	88	81	76	76	84	79	74	81	76	72	77	74	70	68	68
3	89	79	70	64	87	77	69	63	63	74	67	62	71	65	61	68	63	59	57	57
4	82	69	60	54	79	68	60	53	53	65	58	52	63	57	52	61	55	51	48	48
5	75	62	53	46	73	61	52	46	46	58	51	45	56	50	44	54	49	44	42	42
6	69	56	47	40	67	55	46	40	40	53	45	39	51	44	39	49	43	38	36	36
7	64	50	41	35	62	49	41	35	35	48	40	35	46	39	34	45	39	34	32	32
8	60	46	37	31	58	45	37	31	31	44	36	31	42	36	31	41	35	30	28	28
9	56	42	34	28	54	41	33	28	28	40	33	28	39	32	28	38	32	27	26	26
10	52	39	31	26	51	38	31	25	25	37	30	25	36	30	25	35	29	25	23	23

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

14-OVHP-RTK-LED-2000L-3000L-4000L-DIM10-MVOLT-35K-40K-50K-85(4000L)

TEST NO.: **EL10122080**

INPUT WATTS: **34.7**

LUMENS: **4370**


CRI: **85**

EFFICACY: **126**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	531.56	12.20	12.20
0-30	1132.48	25.90	25.90
0-40	1865.88	42.70	42.70
0-60	3366.44	77.00	77.00
0-80	4241.52	97.10	97.10
0-90	4325.93	99.00	99.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3479	3778	4072
55	3295	3742	4049
65	3044	3606	3671
75	2632	3191	3049
85	1678	2101	1821

Lumens Per Zone

Zone	Lumens
0-10	137.35
10-20	394.20
20-30	600.92
30-40	733.40
40-50	776.89
50-60	723.68
60-70	556.17
70-80	318.90
80-90	84.41

Candela Tabulation

0	
0.0	1452.054
5.0	1444.880
15.0	1383.990
25.0	1267.980
35.0	1107.690
45.0	915.160
55.0	702.880
65.0	478.580
75.0	253.350
85.0	54.400
90.0	4.040

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%	
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	0%
0	119	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	99
1	108	103	99	95	105	101	97	93	93	97	93	90	92	90	87	89	87	85	82	82
2	98	90	83	77	96	88	81	76	76	84	79	74	81	76	72	77	74	70	68	68
3	89	79	70	64	87	77	69	63	63	74	67	62	71	65	61	68	63	59	57	57
4	82	69	60	54	79	68	60	53	53	65	58	52	63	57	52	61	55	51	48	48
5	75	62	53	46	73	61	52	46	46	58	51	45	56	50	45	54	49	44	42	42
6	69	56	47	40	67	55	46	40	40	53	45	39	51	44	39	49	43	38	36	36
7	64	50	41	35	62	49	41	35	35	48	40	35	46	39	34	45	39	34	32	32
8	60	46	37																	

- 1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems
 2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems
 3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	<input type="checkbox"/> LEDRU LED Relay Zone Controller 0-10V ¹	<input type="checkbox"/> FCJS-0-10 Lutron Vive 0-10V Individual Control Models ¹⁴	<input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit ¹⁵	<input type="checkbox"/> ZL027 -NOW Intellect Power Control Module ¹⁶	<input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Module ¹⁷	<input type="checkbox"/> XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ¹⁸	<input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹
	<input type="checkbox"/> LEDDU LED Zone Controller 0-10V ¹	<input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Individual Control Models ¹⁴		<input type="checkbox"/> ZL027 -DLE Intellect Power Control Module ¹⁶	<input type="checkbox"/> EN-ALC-ZB-BK-DR Wireless Area Lighting Control Module ¹⁷		<input type="checkbox"/> FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ¹⁹
INTEGRAT OCCOPANCY& DAYLIGHT SENSOR	N/A	<input type="checkbox"/> DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System ²	<input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor	<input type="checkbox"/> SNS200 SNS200 for grouping ²	<input type="checkbox"/> FD-301 Fixture integrated Daylight Dimming Sensor ²
				<input type="checkbox"/> ZL00J -DOW Intellect Intelligent Fixture Control System ²	<input type="checkbox"/> ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	<input type="checkbox"/> SNS300 SNS300 for networks ²	<input type="checkbox"/> FS-205 Fixture integrated passive infrared occupancy sensor ²
*WIRELESS OCCUPANCY SENSOR	<input type="checkbox"/> E0SCU-W-E0 Occupancy Sensor - Ceiling Mounted ³	<input type="checkbox"/> LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	<input type="checkbox"/> EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	<input type="checkbox"/> LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	<input type="checkbox"/> ELLSU-W-E0 Light Level Sensor - Ceiling Mounted ³	<input type="checkbox"/> LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	<input type="checkbox"/> EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	<input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System <input type="checkbox"/> ZL00J -DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	<input type="checkbox"/> EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN-ALC-ZB-BK-DR Control Unit) ³	<input type="checkbox"/> SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESORIES	N/A	N/A	<input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready <input type="checkbox"/> CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.