


B62PLR-E

6" Dual Lamp CFL Non-IC Remodel Housing

LAMP WATTAGE: UP TO 2X13W



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

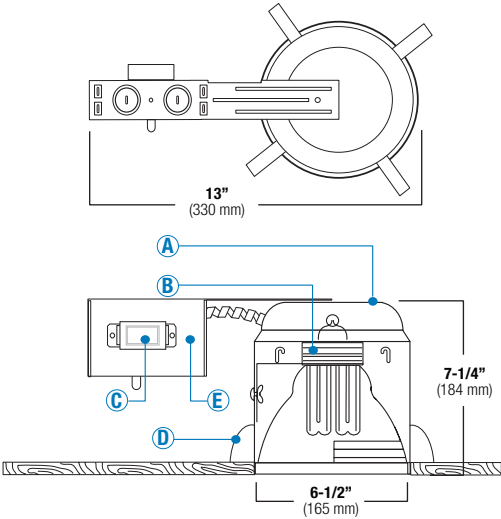

Catalog Number:

Project Name:

Type:

Note:



DESCRIPTION

Thermally protected, non-IC rated specification grade remodel compact fluorescent recessed housing. Accommodates (2) 13W Compact fluorescent lamp. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with strain relief.

SPECIFICATION


A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection.

B. SOCKET - Two vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

C. BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance.

D. INSTALLATION - Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".

E. JUNCTION BOX - feed through wiring and provided with eight 1/2" KOs and four Romex knock-outs with strain relief.

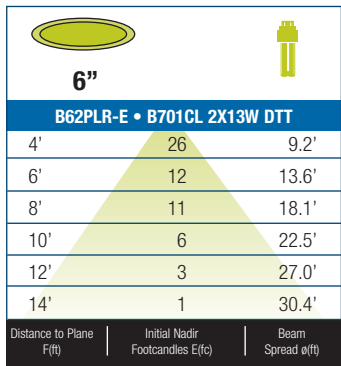

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Thermally Protected remodel compact fluorescent Non-IC housing.
- Integral fluorescent ballast.
- Unit slips through 6-1/2" ceiling opening.
- Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".
- Can be installed from below the ceiling.
- Adjustable socket bracket.
- Wire through junction box.
- Dependable, favorable design and effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.



B62PLR-E - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE			BAFFLE	REFLECTOR	TRIM/RING	GLASS	
<input type="checkbox"/> 2X13W	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> 120	<input type="checkbox"/> EMG 750 (750 Lumens) ⁶	<input type="checkbox"/> B701	<input type="checkbox"/> B706	<input type="checkbox"/> B736	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green	
	<input type="checkbox"/> (S) Energy Star ²	<input type="checkbox"/> 277	<input type="checkbox"/> EMG 1300 (1300 Lumens) ⁶	<input type="checkbox"/> B702	<input type="checkbox"/> B706L	<input type="checkbox"/> B757	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow	
	DIMMING	AIR-SHUT	OTHER OPTIONS	<input type="checkbox"/> EMG-D-750 (750 Lumens) ⁷	<input type="checkbox"/> B620	<input type="checkbox"/> B707	<input type="checkbox"/> B758	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
				<input type="checkbox"/> ICE-1300 (1300 Lumens) ⁸	<input type="checkbox"/> B703	<input type="checkbox"/> B707L	<input type="checkbox"/> B760	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
				<input type="checkbox"/> B704	<input type="checkbox"/> B743	<input type="checkbox"/> B759	<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue	
				<input type="checkbox"/> B751	<input type="checkbox"/> B756	<input type="checkbox"/> B788	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange		
				<input type="checkbox"/> B752	<input type="checkbox"/> B741	<input type="checkbox"/> B785	<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue		
				<input type="checkbox"/> B753	<input type="checkbox"/> B742	<input type="checkbox"/> B796	<input type="checkbox"/> SHZ		<input type="checkbox"/> White		
				<input type="checkbox"/> B754	<input type="checkbox"/> B737	<input type="checkbox"/> B780			<input type="checkbox"/> Red		
				<input type="checkbox"/> B705	<input type="checkbox"/> B755	<input type="checkbox"/> B789					
				<input type="checkbox"/> B705L	<input type="checkbox"/> B735						

1- (M) Magnetic = Available only in 9W fixture and not available in MVOLT • 2- (S) Energy Star = Available on selected fixtures only, please see list above • 3- MARK 7 = Not available in 9W, 13W, 57W, 70W • 4- MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • 5- LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • 6- EMG = Emergency battery pack w/ remote test switch • 7- EMG-D = Emergency battery pack w/ remote test switch for damp location • 8- ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • 9- FUSE = Single slow-blow fuse • 10- RIF = Radio interference filter

Specifications:

B62PLR-E - WATT - BALLAST - VOLTAGE - AIR-SHUT - EMERGENCY - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

Sample of Catalog Number: B62PLR-E-2X13W-E-120-EMG750-B701CL-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

6" CFL Trims

(LAMP WATTAGE: UP TO 2X13W)

Catalog Number:

Project Name:

Type:


Note:

elite LIGHTING

B701CP-WH CONE REFLECTOR




AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, SHZ-WH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN



B702P-RG-WH CONE REFLECTOR/BAFFLE TRIM




BAFFLE FINISH:
W, P
REFLECTOR FINISH:
CL, RG
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B620-NAVY BLUE GLASS TRIM




GLASS FINISH:
GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, WHITE, RED



B703RG-WH WALL WASH REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN
COVER FINISH:
WH, BK



B704W-CL REFLECTOR BAFFLE WALL WASH




BAFFLE FINISH:
W, P
REFLECTOR FINISH:
CL, RG
COVER FINISH:
WH, BK



B751WH SMOOTH FROST DOME SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B752WH DESIGNER POINT SHOWER LENS




LENS:
FROSTED/CLEAR
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B753WH DESIGNER CONE SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B754WH SMOOTH FROST SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B705CP METAL ALBALITE LENS




LENS:
ALBALITE
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B705L PLASTIC ALBALITE LENS




LENS:
ALBALITE
TRIM/RING FINISH:
WHITE PLASTIC



B706PB METAL FRESNEL LENS



LENS:
FRESNEL
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B706L PLASTIC FRESNEL LENS



LENS:
FRESNEL
TRIM/RING FINISH:
WHITE PLASTIC



B707CP METAL DROP OPAL LENS



LENS:
DROP OPAL
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B707L PLASTIC DROP OPAL LENS




LENS:
DROP OPAL
TRIM/RING FINISH:
WHITE PLASTIC



B743RG-WH REFLECTOR W/ DROP OPAL LENS



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011

6" CFL Trims

(LAMP WATTAGE: UP TO 2X13W)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

B756CL-WH
REFLECTOR W/ PRISMATIC LENS




REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



7-1/4"

B741RG-WH
REFLECTOR W/ ALBALITE LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B742CL-WH
REFLECTOR W/ FRESNEL LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B737W-WH
BAFFLE W/ DROP OPAL LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B755W-WH
BAFFLE W/ PRISMATIC LENS




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B735P-WH
BAFFLE W/ ALBALITE LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



7-1/4"

B736W-WH
BAFFLE W/ FRESNEL LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B757W-WH
BAFFLE W/ FROSTED DOME SHOWER LENS




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B758CL-WH
REFLECTOR W/ FROSTED DOME SHOWER LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B760W-WH
BAFFLE W/ FROSTED LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B759CL-WH
REFLECTOR W/ FROSTED LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




7-1/4"

B788WH
SQUARE ALBALITE SHOWER LENS



LENS:
WHITE

TRIM/RING FINISH:
WH




7-1/2"

B785WH
SQUARE FRESNEL LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH




7-1/2"

B796WH
SQUARE SMOOTH FROST DOME LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH




7-1/2"

B780WH
SQUARE DESIGNER POINT LENS



LENS:
FROSTED/CLEAR

TRIM/RING FINISH:
WH




7-1/2"

B789WH
SQUARE DESIGNER CONE LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH



7-1/2"

elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011