



FEATURES OF LITE_BELT FAMILY

The Lite_Belt system is a flexible lighting platform designed to support a wide range of sculptural and linear configurations through a woven belt structure. Various luminaire types—including Linear Diffused, Sphere, Globe, and Cylinder elements—are mounted directly onto a 21 mm wide sewn woven belt, allowing fixtures to be positioned freely along the belt without fixed cut units.

The woven belt is supplied in continuous lengths up to 100 ft and can be trimmed on site to accommodate custom layouts and spatial requirements. With no predefined cutting increments, designers have full freedom to shape each installation precisely to the intended form.

Lite_Belt belts are available in a broad palette of colors to complement diverse interior environments, including black, snow white, gray, orange, brown, terracotta, green, red, and navy blue, among others. This variety enables both subtle integration and bold visual expression within architectural spaces.

The system supports both loose, draped compositions—where luminaires appear casually bound along the belt—and taut, tensioned installations with clean linear alignment.

This duality allows Lite_Belt to function as either an expressive decorative feature or a refined architectural lighting element.

A comprehensive range of accessories, including canopies, power connectors, and mounting clips, supports recessed, surface-mounted, and suspended applications, providing clean and flexible terminations for a wide variety of installation scenarios.

SYSTEM POWER & PERFORMANCE

Each Lite_Belt system is recommended to operate at a maximum total load of 150 W per belt run. To minimize voltage drop and maintain consistent performance, the following guidelines are recommended:

Up to 10 m: ≤ 100 W
Up to 20 m: 150–200 W
Up to 30 m: up to 300 W

Voltage drop may occur at belt lengths exceeding 30 m. Proper power planning is recommended for extended runs.

LED MODULE PERFORMANCE

Lite_Belt is suitable for decorative, ambient, and feature lighting across hospitality, retail, gallery, workplace, and residential environments. Its modular nature and visual flexibility make it ideal for projects requiring customized forms, adaptable layouts, and expressive lighting compositions.

APPLICATIONS

The Lite_Belt System's luminaires are equipped with 2-step McAdam Eclipse LEDs, which provide consistent color across all fixtures, and 90+CRI. The LEDs are available in a variety of kelvin temperature options.


WARRANTY

Five-year warranty for parts and components.

THE BELT OPTIONS

** the default belt length is 50 ft or 100 ft, the belts are cuttable without cut unit.*

LBL-BT-100-BLK / GRY / SWH / GRE / NVY / ORA / RED / PEC / DWD




BLK
(Black)




GRY
(Grey)




SWH
(Snow White)




GRE
(Green)




NVY
(Navy Blue)




ORA
(Orange)



RED
(Red)





PEC
(Pecan)



DWD
(Dark Wood)



LBL-ACC-1 | Belt Bracket

● BK - (black) ○ WH - (white)

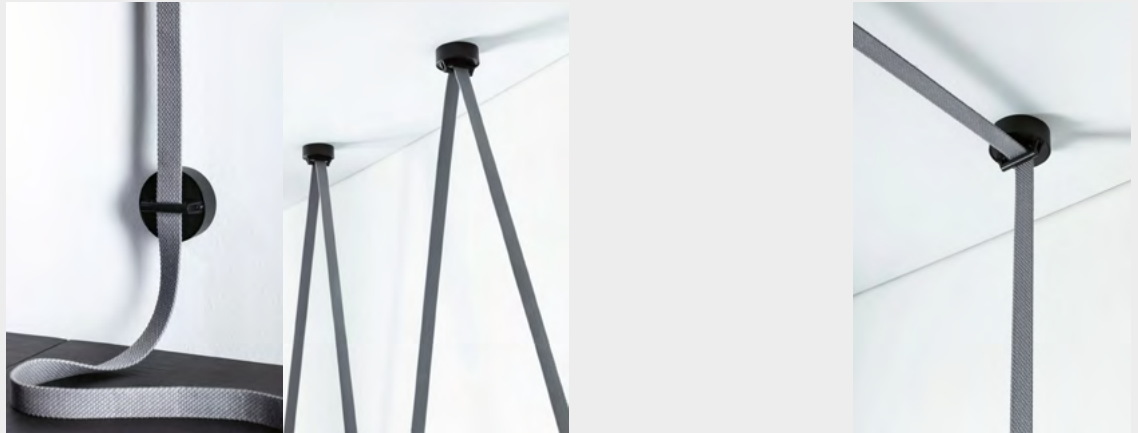





LBL-ACC-2 | Belt Clamp

● BK - (black) ○ WH - (white)

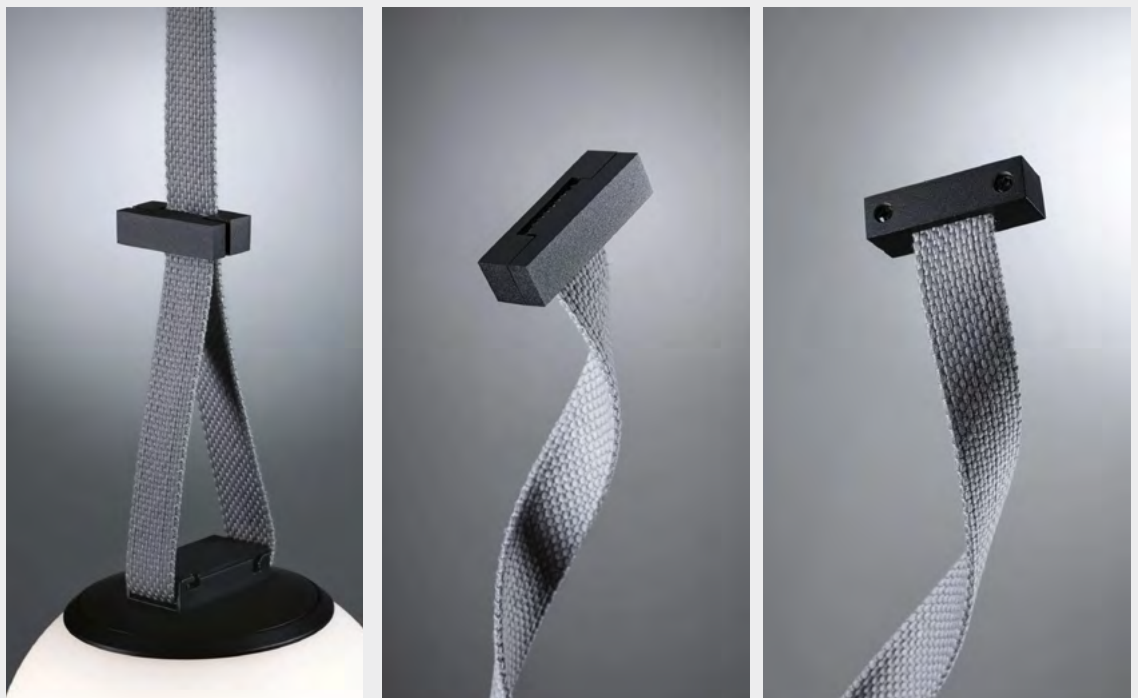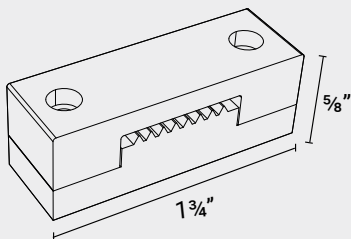


LBL-ACC-3 | Belt Straight Bracket

● BK - (black) ○ WH - (white)

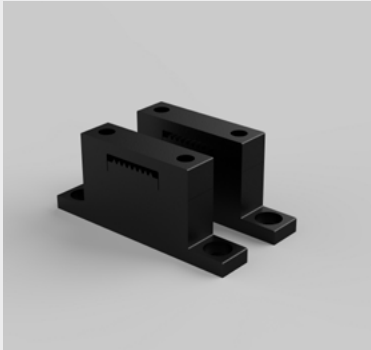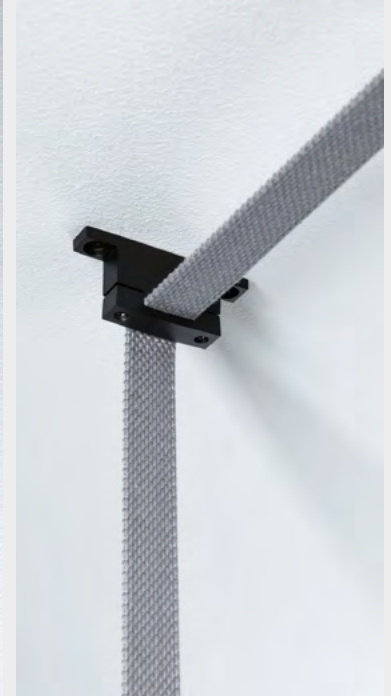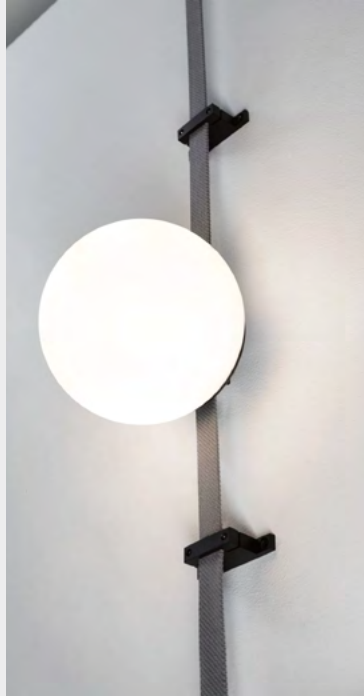



LBL-CM-CANOPY | Ceiling Mount Canopy

● BK - (black) ○ WH - (white)



LBL-RTL-CANOPY | Recessed Mount Canopy

● BK - (black) ○ WH - (white)

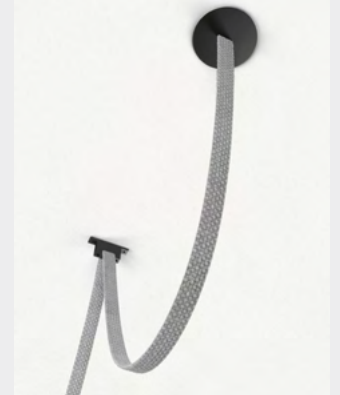

LBL-ACC-4 | Input Module

● BK - (black) ○ WH - (white)



LBL-ACC-5 | Suspended Hanging Wire

● BK - (black) ○ WH - (white)



DRIVER OPTIONS:
ED-96W-48V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
ED-96W-48V-TRIAC/DIM10	120-277VAC	48V	96W	2A	Dry, Damp & Wet Locations	FCC, cULus, Class 2, RoHS

ED-150W-48V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
ED-150W-48V-TRIAC/DIM10	120-277VAC	48V	150W	3.13A	Dry, Damp & Wet Locations	FCC, cULus, Class 2, RoHS

ED-300W-48V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
ED-300W-48V-TRIAC/DIM10	120-277VAC	48V	300W	6.25A	Dry, Damp & Wet Locations	FCC, cULus, Class 2, RoHS

LITE_BELT LUMINAIRE OPTIONS:




LBL-L1R-24
Linear Diffused




LBL-L1R-32
Linear Diffused




LBL-L1R-40
Linear Diffused

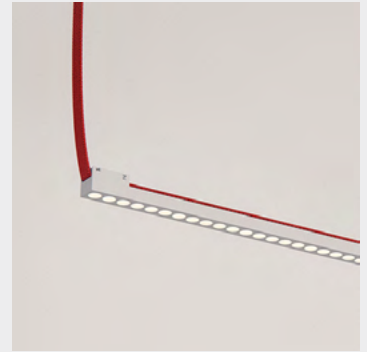


LBL-L4R-24
Linear Downlight & Task

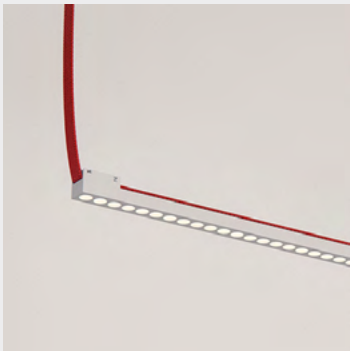


LBL-L4R-32
Linear Downlight & Task

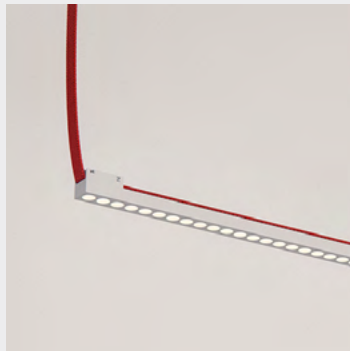

LBL-L4R-40
Linear Downlight & Task

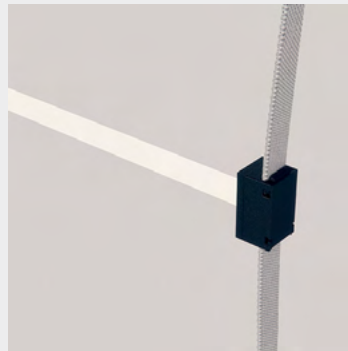

LBL-LS-12
In-Between Linear Diffused

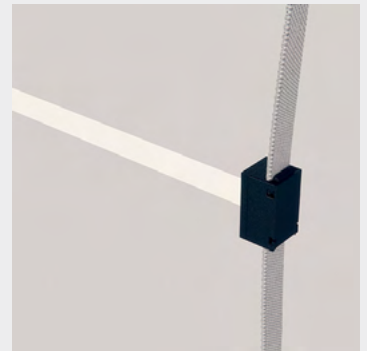


LBL-LS-20
In-Between Linear Diffused



LBL-LS-28
In-Between Linear Diffused



LBL-T12-1
Cylinder Downlight

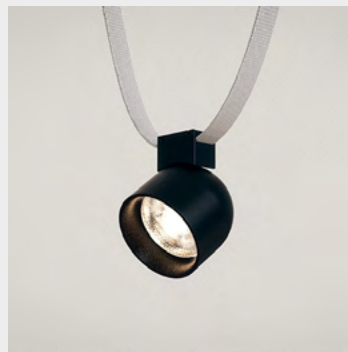

LBL-T2-1
Spot Rondo




LBL-T15-1
Dome Light



LBL-P2-1
Pendant Chandelier



LBL-P2-1
Cylinder Diffused

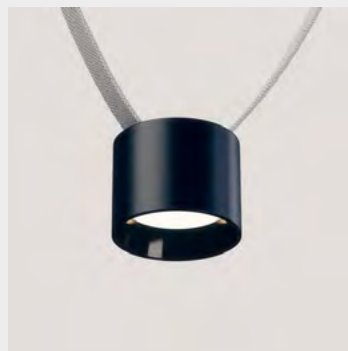

LBL-LS-20
Cylinder Regressed