



LUMENS	3000, 8000	DIAMETERS	56", 80"
CCT & TECHNOLOGIES	3000K, 3500K, 4000K	HEIGHT	26", 34"
COLOR QUALITY	3 Step MacAdam Ellipse	FIXTURE FINISH	BK (Black), WH (Matt White), SI (Silver), Custom RAL
MOUNTING	Pendant, Suspended	MATERIAL COLORS	Refer to SoftSense Material Color Chart
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH, DIMTR	PHOTOMETRIC TESTS	In Accordance with IES LM79-08 and LM-80, and TM-30

"Rhapsody" family consists of acoustic pendant or suspended fixtures. The luminaire's simple, classic look provides light over any environment and the added acoustic feature makes it suitable for any design application such as schools, boardrooms, office areas, hotels, lobbies, restaurants, etc.

Octo is named for its 8-sided interlocking design. The acoustic covers surrounds the luminaire with a sculptural structure that softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space



ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

Noise Reduction Coefficient (NRC) - 0.75
Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

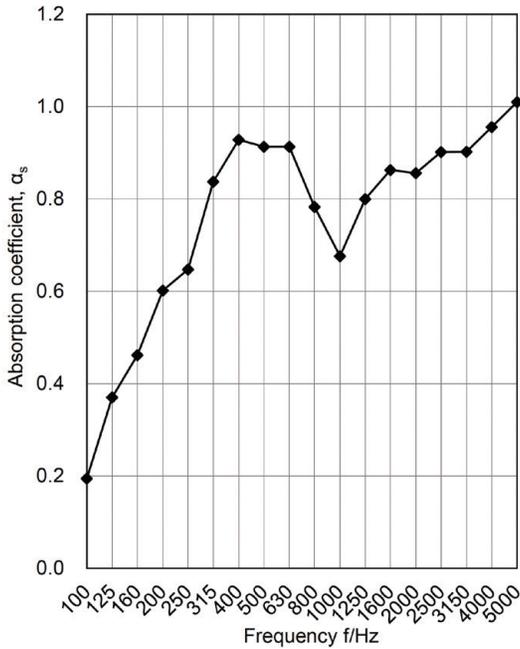

CONSTRUCTION

PET material wrapped around rigid steel design that ensures longevity and endurance. A high quality, high transmission PMMA glare free lens offers smooth illumination.

OPTICS & PERFORMANCE

The light engines found in the OPR-LED-Rhapsody are rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K, and 4000K. Rated and tested to LM-79, LM-80, and TM-30 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. OPR-LED-Rhapsody comes standard with 0-10V dimming on either 120V-277V.

DIMMING

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, or 277.
DIMTR - Triac & Electronic low voltage dimming. Available in 120V.
LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

MOUNTING

Comes standard in adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Available with Side Canopy Mounting & Central Canopy Mounting. Mounts to 3.5" and 4" octagonal junction box.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

cULus - Listed for Feed Through Wiring.
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.
UL Listed for Dry location

QUALITY CONTROL

Every fixture is rigorously tested by our QC Department before shipping.

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

OPTIONS

Available without light source.

LUMEN DETAILS

Based on 4000K, 80+ CRI.
Actual wattage may vary +/- 5%

DIRECT		
SIZE	LUMENS	WATTS
3 ft.	8000	111
2 ft	3000	46

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS




quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A

OPR-RHAPSODY-SOFT-OCTO-8IN-2-3000L-DIM10-MVOLT-40K-WH
WATTAGE: **50.1** LUMENS: **3637**

TOTAL LUMINAIRE EFFICACY: **73**

Candle Power Distribution (Candelas)

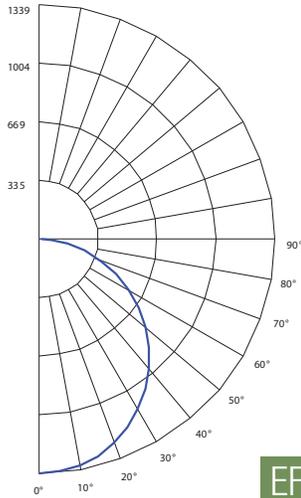

Zonal Lumens Summary

Zone	Lumens	%Fixt
0-30°	1024.69	28.20
0-40°	1665.31	45.90
0-60°	2910.37	80.10
0-90°	3637.28	100.00
0-180°	3637.28	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	1062	1042	1019
55°	1024	1000	965
65°	972	939	883
75°	883	835	732
85°	691	593	379

Candela Tabulation

	0	45	90
0	1338.653	1338.653	1338.653
5	1334.080	1329.570	1327.120
15	1284.940	1275.520	1268.150
25	1185.460	1172.340	1160.730
35	1046.610	1031.180	1015.600
45	877.290	861.030	841.900
55	686.220	670.230	646.730
65	480.050	463.930	436.060
75	267.030	252.570	221.320
85	70.410	60.370	38.580
90	13.520	7.850	1.660

Spacing Criteria

0-180	: 1.26
90-270	: 1.22
Diagonal	: 1.36

EFFICACY: 73 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF


RC RW	80%			70%			50%			30%			10%			0%		
	70%	50%	30%	70%	50%	30%	50%	3	10%	50%	3	10%	50%	3	10%	50%	3	
0	119	119	119	119	116	116	116	116	111	111	111	107	107	1	102	1	102	100
1	109	104	100	96	106	102	98	9	98	9	92	9	91	8	90	8	86	84
2	99	9	79	97	89	8	78	86	81	7	82	7	74	79	76			
3	91	8	66	88	79	7	65	76	69	6	73	6	63	70	66			
4	83	7	56	81	70	6	55	67	60	5	65	5	54	63	57			
5	76	6	48	74	62	5	48	60	53	4	58	5	47	56	51			
6	71	5	42	69	56	4	42	54	47	4	53	4	41	51	45			
7	65	5	37	64	51	4	37	50	42	3	48	4	36	47	41			
8	61	4	33	59	47	3	33	45	38	3	44	3	33	43	37			
9	57	4	30	55	43	3	30	42	35	2	41	3	29	40	34			
10	53	4	27	52	40	3	27	39	32	2	38	3	27	37	31			

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

OPR-RHAPSODY-SOFT-OCTO-8IN-3-8000L-DIM10-MVOLT-40K-WH
WATTAGE: **119.5** LUMENS: **8694**

TOTAL LUMINAIRE EFFICACY: **73**

Candle Power Distribution (Candelas)

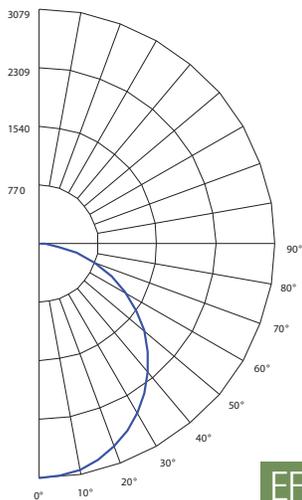

Zonal Lumens Summary

Zone	Lumens	%Fixt
0-30°	2384.22	27.50
0-40°	3901.76	44.90
0-60°	6891.74	79.40
0-90°	8693.56	100.00
0-180°	8693.56	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	2426	2366	2364
55°	2306	2221	2223
65°	2088	1968	1978
75°	1647	1453	1476
85°	613	414	431

Candela Tabulation

	0	45	90
0	3079.291	3079.291	3079.291
5	3063.680	3054.940	3054.260
15	2941.650	2919.930	2918.020
25	2717.110	2682.140	2680.090
35	2399.560	2356.800	2354.480
45	2004.920	1954.650	1953.700
55	1545.840	1488.600	1490.240
65	1031.270	972.110	976.750
75	498.160	439.410	446.380
85	62.480	42.180	43.860
90	4.340	4.690	4.670

Spacing Criteria

0-180	: 1.24
90-270	: 1.24
Diagonal	: 1.38

EFFICACY: 73 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC RW	80%			70%			50%			30%			10%			0%		
	70%	50%	30%	70%	50%	30%	50%	3	10%	50%	3	10%	50%	3	10%	50%	3	
0	119	119	119	119	116	116	116	111	111	111	107	107	1	102	1	102	100	
1	109	104	100	96	106	102	98	9	98	9	92	9	91	8	90	8	86	84
2	99	9	78	96	89	8	77	85	80	7	82	7	74	79	75			
3	90	8	65	88	78	7	64	75	69	6	72	6	62	70	65			
4	83	7	55	80	69	6	55	67	60	5	64	5	53	62	57			
5	76	6	47	74	62	5	47	60	52	4	58	5	46	56	50			
6	70	5	41	68	56	4	41	54	46	4	52	4	40	51	45			
7	65	5	36	63	51	4	36	49	41	3	48	4	36	46	40			
8	60	4	32	59	46	3	32	45	37	3	44	3	32	42	36			
9	57	4	29	55	42	3	29	41	34	2	40	3	29	39	33			
10	53	4	26	52	39	3	26	38	31	2	37	3	26	36	30			

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

*Testing is based on original luminaire used without the acoustic